
# HARRISON COUNTY CORNER REFERENCE

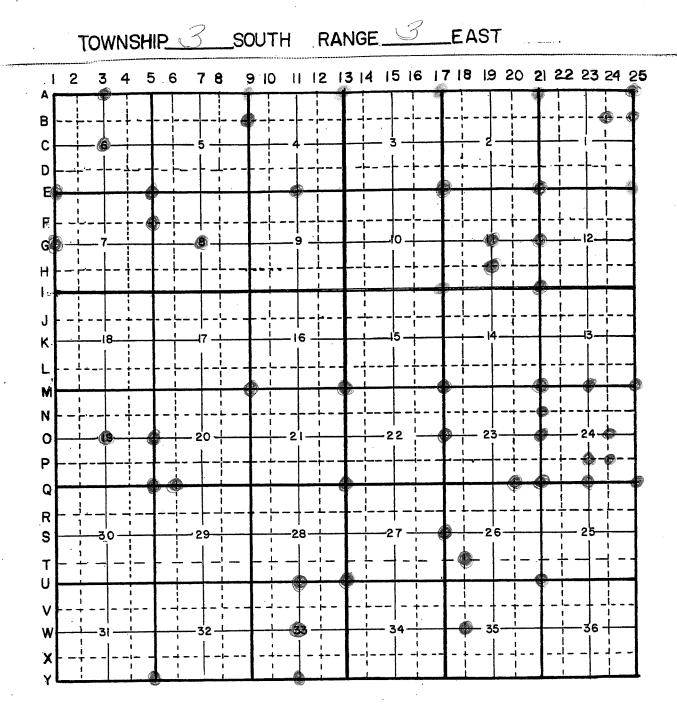

T 3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

Section Corner on Range Line to Sections 6 and 7

	EXISTING	IG SURVEYS					
Original Government Survey		Original Evidence Found					
Year surveyed 1805		Year of search N/A By					
Original monument Wood Post		Monument found					
(wood post, stone, pile of stones, etc)		***************************************					
	*	Original Bearing Trees Found					
Bearing Trees		Species					
Species		Diameter					
Diameter		Bearing					
Bearing		Distance					
Distance							
Subsequent Corner Restoration	1	Evidence of Subsequent Corner Restoration Found					
Year surveyed By		Year of search 1999 By VHM					
Where filed or recorded		Recovered 1½" (outside diameter) pipe, projecting 0.6'					
Monument(Original, concrete post, iron rod, et		by Mr. Roy Harmon. Mr. Harmon stated that pipe has					
(Original, concrete post, iron rod, et	tc)	been there for along time.					
Bearing Trees, Reference Ob	bjects						
Species							
Diameter							
Bearing							
Distance							
At time of search:  1. Did you have the record description? Yes X No  2. How was search area located? pacing, chaining, photo, maps,	Section line to Object Record Distance Measured Distance Describe evide clearings, timb testimony, If ar which flows No	Other Evidence nce of use and occupation such as roads, fences, er cutting lines, plantations, etc Cite source of ny. Pipe is situated 40± feet Northwest of rock drain ortheast to Southwest.  Perpetuation Record accessories established. Include brief description of sonite post 0.5' South and placed a cairn of rocks around					
etc. SURVEYING  3. Man hours spent in search N/A  4. Do you think additional search might recover evidence? Yes No X  5. Signature	1	r restoration certificate prepared Yes No records at _Survey Book 4, Page 370  ISPCS, East Zone, 1983 Datum (1999) US Survey Foot					

T 3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

West Ouarter Corner	to Section	7	and	
West Ouarter Corner	to Scotion		anu	

EXISTIN	G SURVEYS				
Original Government Survey	Original Evidence Found				
Year surveyed <u>1805</u> Original monument <u>Wood Post</u>	Year of search N/A By Monument found				
(wood post, stone, pile of stones, etc)					
Bearing Trees	Original Bearing Trees Found				
Species	Species				
Diameter	Bearing				
Bearing	Distance				
Distance					
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found				
Year surveyedBy	Year of search 1999 By VHM				
Where filed or recorded	Recovered 6" by 7" sandstone, projecting 4", on South crown of 22" Ash tree.				
Monument(Original, concrete post, iron rod, etc)	CIOWII OI 22 ASII II ee.				
	_				
Bearing Trees, Reference Objects Species					
Diameter	-   ·				
Bearing	_				
Distance	-				
Section line to Object Record Distar Measured Dis  Describe evid clearings, tim testimony, If a drain and 100					
At time of search:  1. Did you have the record description? Yes X No  2. How was search area located? pacing, chaining, photo, maps, etc. SURVEYING  3. Man hours spent in search N/A  Certified corn	Perpetuation Record d accessories established. Include brief description of a cairn of rocks around monument. gn Beech Sugar 32° 8"  N 73° W S 15° W 20.6' 10.6'  er restoration certificate prepared Yes No ty records at Survey Book 4, Page 370				

UNTY

2ND EAST

RANGE


TOWNSHIP

COPNER 3-A

PRINCIPAL MERIDIAN

	REMARKS	Sign Placed	Sign Placed	Sign Placed			- -	
	FIELD BOOK	#4 Pg11	_	in the second				and the second s
	CHECKED BY	9	X • X •	X S		_		
	DATE CHECKED	A: 2 9 0	4 - 2 - 30	4-2-90	4			
BEARING	FROM CORNER	318-00-00	177-00-00	318-00-00		T. P. St. St. St. St. St. St. St. St. St. St		
DISTANCE	FROM CORNER	18,64	87 98	29,14				
)N OF	REFERENCE	10" Hickory	16" White Oak	8" White Oak				
DESCRIPTION	MONUMENT	#4 REbar					ū	
	LOCATION	N.W. Corner, N.E.% Sec. 6						

3 A

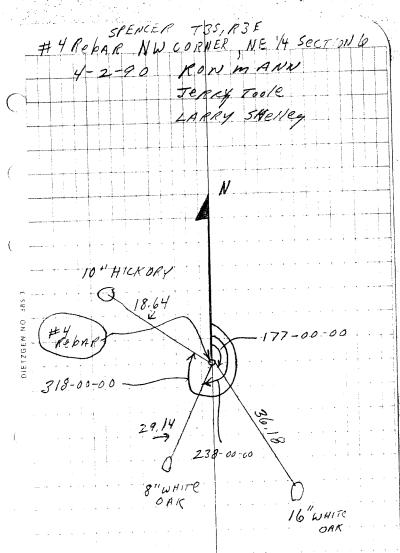

OUNTY

HARRISON

ന RANGE

TOWNSHIP

CORNER 3-C

EAST

2ND

PRINCIPAL MERIDIAN

	DESCRIPTION	N OF	DISTANCE	BEARING				
LOCATION	MONUMENT	REFERENCE	FROM CORNER	FROM	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
S.W. Corner N.E. % Sec.6	Stone	8" Pignut Hickory	13,00	33-00-00	4-2-90	R.M.	24 Pg. 12	2 Sign Placed
		13" Red Oak	22,49	82-00-00	1 m 2 m 90	) 9		Sign Placed
А .		8" Sugar Maple	11.60	156-00-00	4-2-90			Sign Placed

3-C\

4X6 X-MARKED SW CORNER NE QUARTER SECTION 6 T35, R3E SPENCES 84 PIGNUT 13.00 -82-00-00 13" Rebank 156-00-00 11.60 811 5116AC MAPIC

HARRISON

700


JUNITY

TOWNSHIP\_3\_SOUTH

CORNER

RANGE 31 EAST 2 ND PRINCIPAL MERIDIA

REMARKS	-			Sign Placed		ign placed	,	Sign Placed					•					
FIELD	BOOK			#3 Pg.30	T ju jen T V j	<del>- (.)</del>												
CHECKED	BY			T° D°				e E				·						
3000	CHECKED			120-8-		18-00-1		78-08-1			-		-					
DEARING	FROM	COMMEN		S15-20-0W		S15-54-0W		M16-34-0W					den esta de la composição				,	•
DISTANCE DEARING	FROM	COKNEK		19.10		20.95		-12,95	, A	-		~		-		1,1		-
TON OF	REFERENCE		A STATE OF THE STA	6" Hickory		6" Hickory		19" Maple	-			_	-	-	-	•		
DESCRIPTION OF	MONUMENT			Stone			1.		-		•							
	LOCATION		1	S.W. Corner N.E% Section 19			7			-			-					

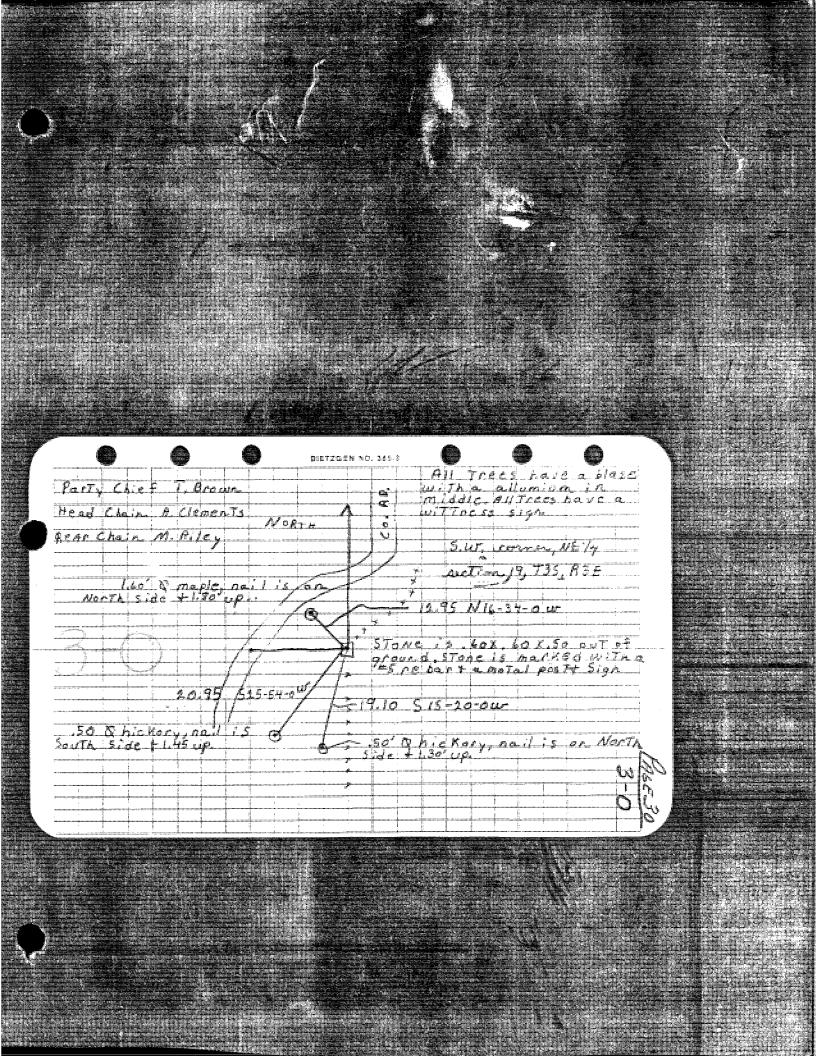

COUNTY

TOWNSHIP SOUTH

CORNER 5-E

2 ND PRINCIPAL MERIDIAN RANGE 3 EAST

REMARKS Sign Placed #3 Pg.2 Sign Placed Sign Placed FIELD BOOK CHECKED G.S. G.S. g. S DY CHECKED 1-7-85 1-7-85 1-7-85 DATE M44030 1W N60030"W CORNER DISTANCE DEARING FROM NO°20'E 32,74 28,10 CORNER FROM 10" Wid Cherry 7" Sassafras 8" Cherry REFERENCE DESCRIPTION OF MONUMENT Stone Section 8 LOCATION


parties fort side NW cor, AW; Ser. 8 7-3-5, 1-3E 1-275/ 7 sasgatian NW Cor, AW; Ser. 8 7-3-5, 1-3E


2 ND PRINCIPAL MERIDIAN RANGE 3 EAST

CORNER -

SOUTH TOWNSHIP\_3 LOCA

No. of the Party of the Control of the Party				gas-di				
	DESCRIPTION OF	rion of	DISTANCE BEARING	BEARING	Ç S	CHECKED	FIELD	REMARKS
LOCATION	MONUMENT	REFERENCE	FROM		DATE	BY	BOOK	
			CORNER	COKNEK	CHECKER			
					<u>-</u> -			
N.W. Corner	\$ \$ \$ \$ \$				-			
		Maple Maple	o -	N72-20'W	58-1-7	w U	T. Dd. €#	Sign Placed
<del>-</del> /								•
·		Maple	25,34	N44-0-30#F	7-02	r r		Sign Þlaced
			, ,	L F C C	L C	Ţ		\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$
-			97.77	3.0°-070	C D eas (	7 <u>2</u> 5		Sign Flaced
		-	•			-	agay (m. m.)	
-					•			

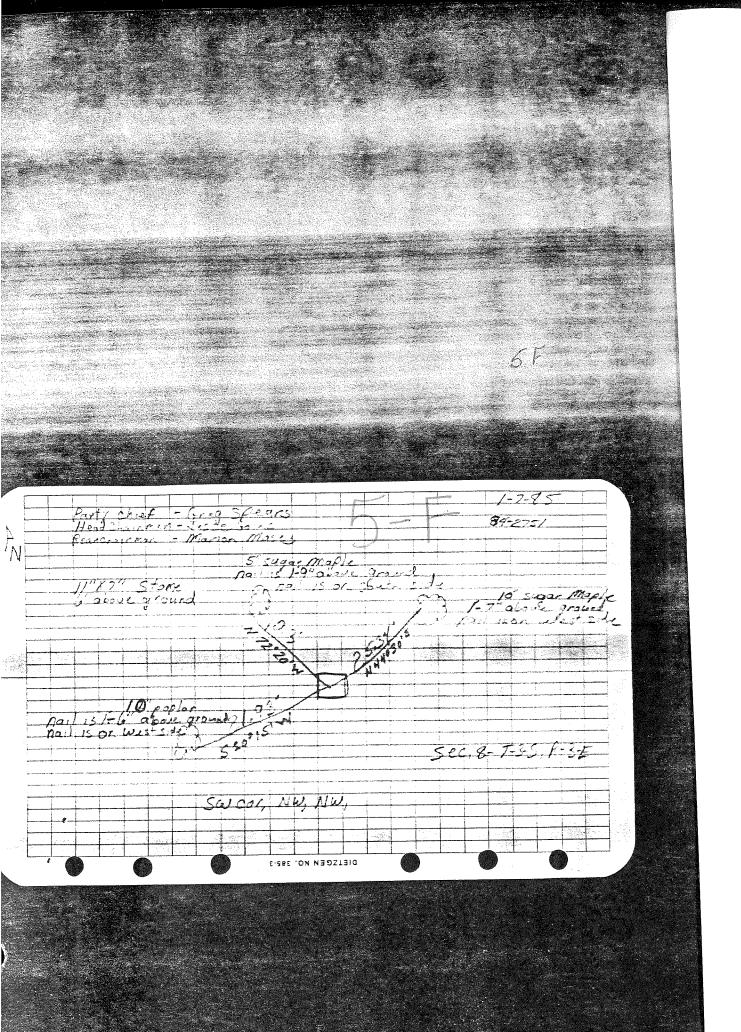

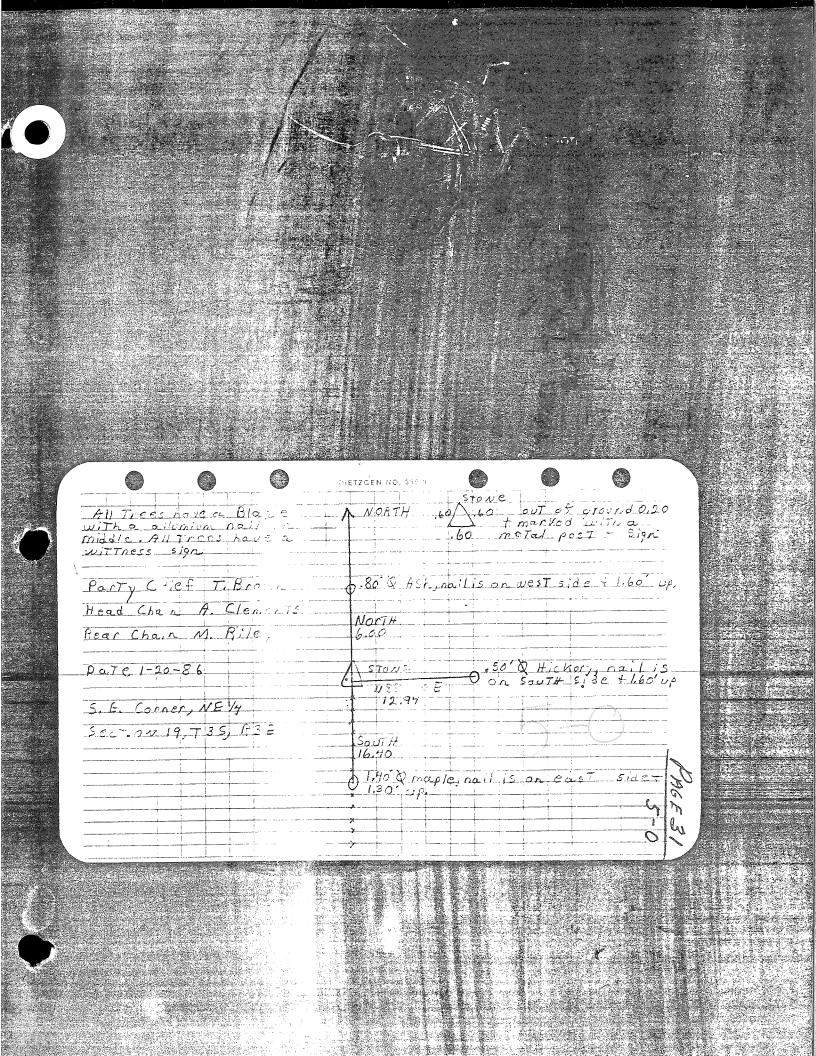


Harrison Co. No. Q-5

5-0

T 3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

Section Corner common to Sections 19 and 20, 29 and 30

EXISTING	SURVEYS				
Original Government Survey	Original Evidence Found				
Year surveyed 1805 Original monument	Year of searchBy Monument found				
Bearing Trees  Species Diameter Bearing Distance	Original Bearing Trees Found  Species Diameter Bearing Distance				
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found				
Year surveyed 1896 By Wm. Churchill Where filed or recorded Legal Survey Book 1, Pg. 321 Monument Stone Corner G (Original, concrete post, iron rod, etc)  Bearing Trees, Reference Objects Species Diameter Bearing Distance	Year of search 2002 By VHM  Recovered 0.6' by 0.8' limestone, projecting 0.5', with "+" cut on top.				
Relation	on of Evidence to Record Features Along Section Lines				



At time of search:

- 1. Did you have the record description? Yes X No
- 2. How was search area located? pacing, chaining, photo, maps, etc. <u>SURVEYING</u>
- 3. Man hours spent in search N/A
- 4. Do you think additional search might recover evidence? Yes \_\_\_\_\_\_No \_X\_\_\_\_

5. Signature	北	H.	M	L
				/

Relation of Ev	vidence to Record Features Along Section Lines
Section line to sections	
Object	
Record Distance	
Measured Distance	

### Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc... Cite source of testimony, If any. Stone is situated at old down fence corner post East and South, on a North facing slope 150± feet West of crown, in woods.

### Perpetuation Record

Monument and accessories established. Include brief description of area. Stone left as recovered.

Sugar	R. Oak	Sugar	# Pin
4"	2"	16"	on North face
N 83° E	N18° W	S 81° W	of Stone
8.6'	8.3'	3.6'	
W/wire			
0 177.4 C.			

& Witness Sign


Certified corner restoration certificate prepared Yes \_\_\_\_\_ No \_\_\_\_ Filed in County records at \_Survey Book 5, Page 194

N: 1087634.7

ISPCS, East Zone, 1983 Datum (2002)

E: 169180.7

US Survey Foot

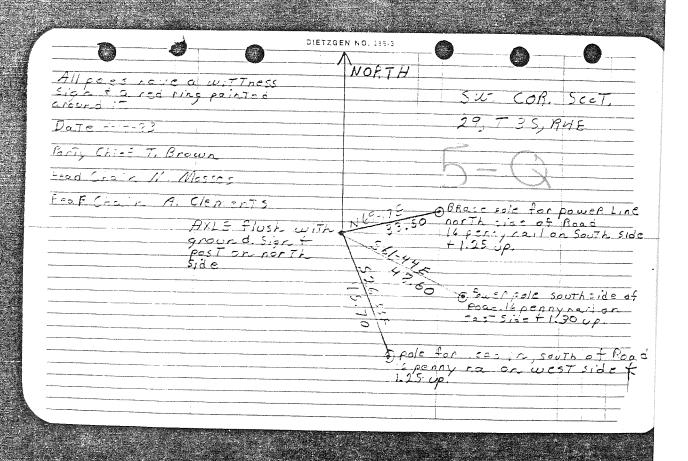

HARRISON

UNTY

EAST

RANGE

TOWNSHIP

CORNER

2ND PRI

PRINCIPAL MERIDIAN

		REMARKS	Sign Placed	Sign Placed	Sign Placed	
		FIELD BOOK	14 Pg. 19		<u> </u>	
	,	CHECKED BY		9 () -	e C	
P.		DATE CHECKED	8 8	8-2-00	S ee 2 ee 9 9	
	BEARING	FROM CORNER	N72-29-0E	S5-39-0W	276-55-0W	
	DISTANCE	FROM	ر ش ش	۲٦ ص س	25°	
	N OF	REFERENCE	60" Maple	40" Maple	7 0 . OT .	
	DESCRIPTION	MONUMENT	Stone out of ground has an X on top. Marked with metal post			
		LOCATION	S.W. Corner Section 32	<i>A</i> .	Political Consequences and an executive security of the securi	

AllTREES have a Blaze with With news a allumium nail in midalc. All TREES have 3 June 5

1.20 out of ground, has Post & Signa maple, nail on anx in top. Stone is Stone 15 0,50x 0,50x marked with a motal & Southside +2,48

N 72-29-0E 7.88

576-55-0W-18,32

LIO BOOK, noil 1.10n t SOUTH

Party Chief 2.17 up.

55-39-0W 13,65

L. Shelley T. Brown Head Chafn

6.40 Omaple, nailon west 42.71 Up. T. Timberlake O Rear Chain

S. W. COR. Section 32

8-2-90

Harrison Co. No. Q-6



Γ <u>3</u> S	R <u>3</u> E	<u>2nd</u>	Principal Meridian	County	Harrison	State	Indiana
--------------	--------------	------------	--------------------	--------	----------	-------	---------

West 1/16 Corner common to Sections 20 and 29

	EXISTING	SURVEYS
Original Government Survey		Original Evidence Found
Year surveyed		Year of searchBy Monument found
Bearing Trees  Species Diameter Bearing Distance		Original Bearing Trees Found  Species Diameter Bearing Distance
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found
Year surveyed 1896 By Wm. Churchill Where filed or recorded Legal Survey E Monument Stone Corner f (Original, concrete post, iron rod, et  Bearing Trees, Reference Ob Species Diameter Bearing Distance	Bk. 1, Page 321	Year of search 2002 By VHM  Recovered arch top, 0.4' by 0.8', limestone, projecting 0.2'.
	Section line to Object Record Distance Measured Distance Describe evides clearings, timber testimony, If ar on North side of	
At time of search:  1. Did you have the record description? Yes X No  2. How was search area located? pacing, chaining, photo, maps, etc. SURVEYING  3. Man hours spent in search N/A	Monument and area. Stone left Twin Oa 31" N 33° E 4.3' W/fence & Witness S	ak         Shingle Oak         Cedar         Carsonite           12"         18"         Post           S 77° E         N 86° W         North           22.0'         41.2'           W/fence
4. Do you think additional search might recover evidence? Yes No _X  5. Signature H. M		r restoration certificate prepared Yes No records at Survey Book 5, Page 194  ISPCS, East Zone, 1983 Datum (2002) US Survey Foot

HARRISON

OO

COUNTY

TH.

(r)

TOWNSHIP

CORNER

RANGE 3

EAST 2

2ND PRINCIPAL MERIDIAN

					•			
	DESCRIPTION	ON OF	DISTANCE	BEARING				
LOCATION	MONUMENT	REFERENCE	FROM CORNER	FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMAPKS
SW. CORNER NEW	Pin found b	low road surf	rface. Pladed	ed #4 rebar	r next to	pin flush with		road
		Electric pole	1e 82,27	N82-41-0e	TO-1-1		#4 Pg41	SIGN PLACED
, .		ELECTRIC POLE	99°68 EI	S55-23-0W	S C com L com			SIGN PLACED
		ELECTRIC POLE	LE 43,90	N23-53-0W	1. 2 m 7 m 9.1	e en		SIGN PLACED
						Marie Marie de Alexandra de Ale		
					e Printere de Carrier			
	standarde enterentario					erre en de de la constitución de l		


HARRISON

OUNTY

(1)

PRINCIPAL MERIDIAN 2ND EAST RANGE TOWNSHIP 0-6 CORNER

	REMAPKS		sign Placed	SIGN PLACED	SIGN PLACED	
	FIELD BOOK	TH ROAD	#4 pg41	<u>7</u>	r.j	
	CHECKED BY	FLUSH WITH	£.	en <del>er en er e</del> n er en e		
	DATE CHECKED	NEXT PIN	1.1 an 7 an 9.1			
BEARING	FROM	D #4 REBAR	N82-41-0	S55 m 23 m 01	N23 53 0	
DISTANCE	FROM CORNER	RFACE PLACED	82.27	96°68	43.90	
N OF	REFERENCE	PIN FOUND BELOW ROAD SU	BLECTRIC	phone box	SLECTRIC	
DESCRIPTION	MONUMENT	PIN FOUND B				
	LOCATION	S.W. COR. NE% SEC. 8	4			

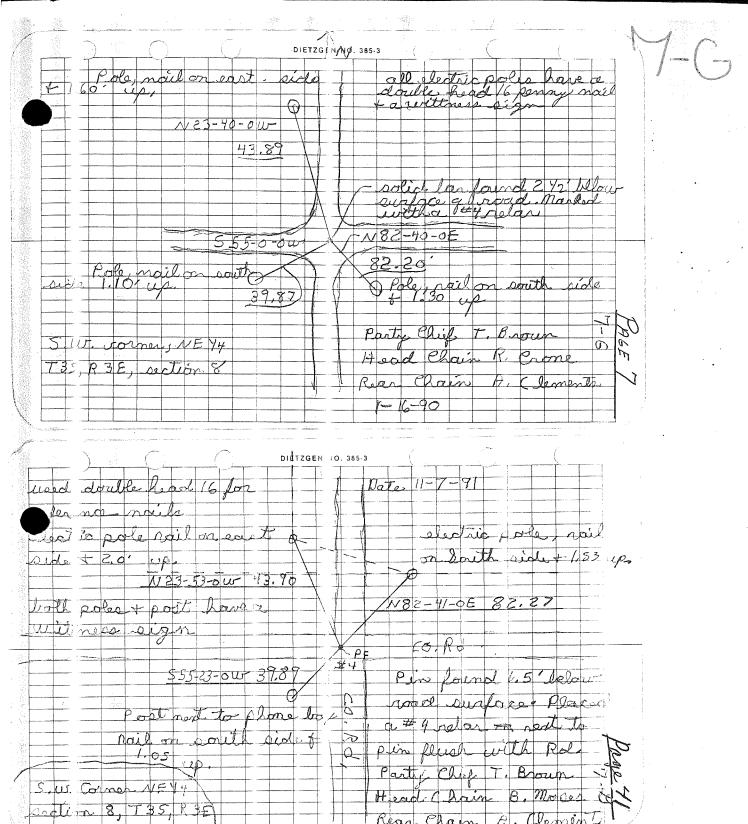

Rear Chain


# HARRISON COUNTY CORNER PERPETUATION RECORD

Section 4, Township 3 South, Range 3 East

Corner Name: Northwest Corner Index: A-9

Monument Type: 5/8" Rebar Above/Below Grade: 0.30' Above Grade

Coordinate: Northing 1108453.82 Easting 175319.03 Datum: NAD83 IN EAST, US Survey Feet



### PERPETUATION RECORD:

Northeast Corner of Section 5, Township 3 South, Range 3 East: A 5/8" rebar was found with a red plastic cap that had been defaced by animal chewing. This monument is shown on an unrecorded survey by \_\_\_\_\_\_,dated 5-29-07. Said survey was attached to a Warranty Deed in the name of James and Jacklyn Conklin recorded as Instrument Number 200705417. A stone that is shown on this survey marking the southwest corner of Section 33, Township 2 South, Range 3 East was found N 86°51'12" W 322.65. An axel was also found on the west line of the Northwest Quarter of Section 4, S 02° 05' 51" W 142.87 feet, this monument is also shown on the David Ruckman Survey.


### Vicinity Reference:

The 5/8" rebar was found on a northwest facing slope, +/-20 south of an southwest to northeast flowing drainage. Remains of a North-South fence were found +/- 50' south of the monument.

### **CORNER REFERENCE**

- A.) 11" Sugar Maple with a mag nail (north face.)
- B.) 16" White oak with a mag nail (northwest face).
- C.) 14" Sugar Maple with a mag nail (south face).
- D.) Orange Carsonite post is 0.50' north.
- E.) T-post 0.50' south

NOTE: The bearings to the Corner References were made with a magnetic compass to the center of the referenced object. The distances are horizontal measurements to a mag nail placed perpendicular to the line of measurement, unless noted otherwise.

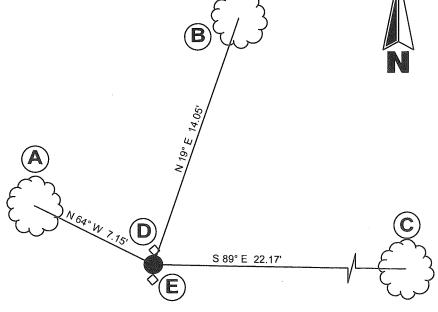



1800 West Main Street, Paoli, Indiana 47454 Phone: 812-723-2900 Email: mcooper@brcjcivil.com

BRCJ Project No. 3-1550

Surveyor: Notthew L. Copper

Matthew L. Cooper

Indiana Professional Survey No. PS20200079

Date: June 22, 2022

County Surveyor: Harold Klinstiver



# HARRISON COUNTY CORNER PERPETUATION RECORD

Section 4, Township 3 South, Range 3 East

Corner Name: Northwest Corner Index: A-9


Monument Type: 5/8" Rebar Above/Below Grade: 0.30' Above Grade

Coordinate: Northing 1108453.82 Easting 175319.03 Datum: NAD83 IN EAST, US Survey Feet

# CORNER REFERENCE IMAGES Photo looking NORTH MONUMENT

# HARRISON COUNTY CORNER PERPETUATION RECORD SECTION DIAGRAM

Section 4 Township 3 South Range 3 East

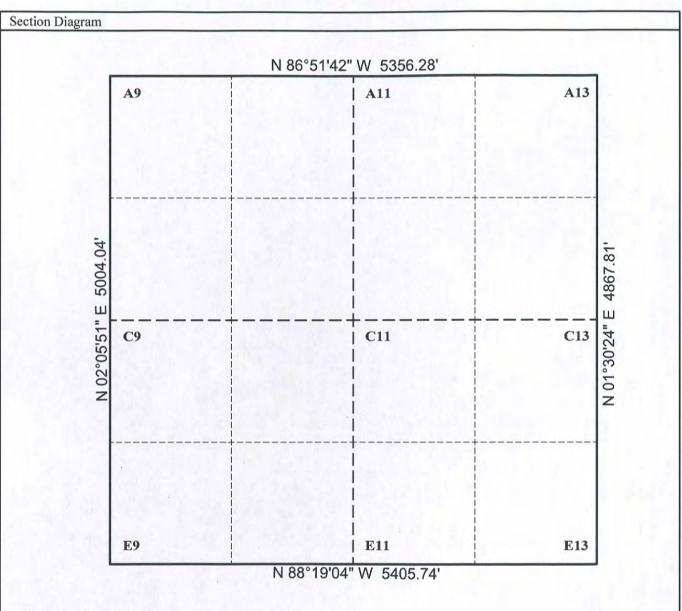

### Notes

- 1. This plat was prepared for the Harrison County Surveyor's office to perpetuate the location of corners referenced per IC 36-2-12-11.
- 2. Basis of Bearings: Grid North (NAD83), Indiana East Zone.
- 3. The distances shown hereon are grid distances. These dimensions are provided as a reference to aid in the recovery of surrounding survey monuments. These measurements are not intended to represent the extent of all quarter corners and quarter-quarter corners, nor should this data be used to calculate boundary lines and corners without verification by a licensed professional surveyor.

County Surveyor: Harold Klinstiver



CORNER RECORD

HARRISON

COUNTY

RANGE


TOWNSHIP 3

9-B

CORNER

EAST 2 ND PRINCIPAL MERIDIAN

	REMARKS	Sign Placed	Sign Placed	Sign Placed	
10	FIELD	#106.31			
	CHECKED	M.B.	M.B.	M.B.	
	DATE	6-15-81	6-15-81	6-15-81	
BEARING	FROM	N43-0E	N23-0W	South	
DISTANCE	FROM	22,701	17.08	23.48	
TION OF	REFERENCE	20" Hickory	20" Elm	24" Hickory	
DESCRIPTION OF	MONUMENT	Stone			
	LOCATION	S.E. Corner of N.E. 4 OF N.E. 4 Section 5			

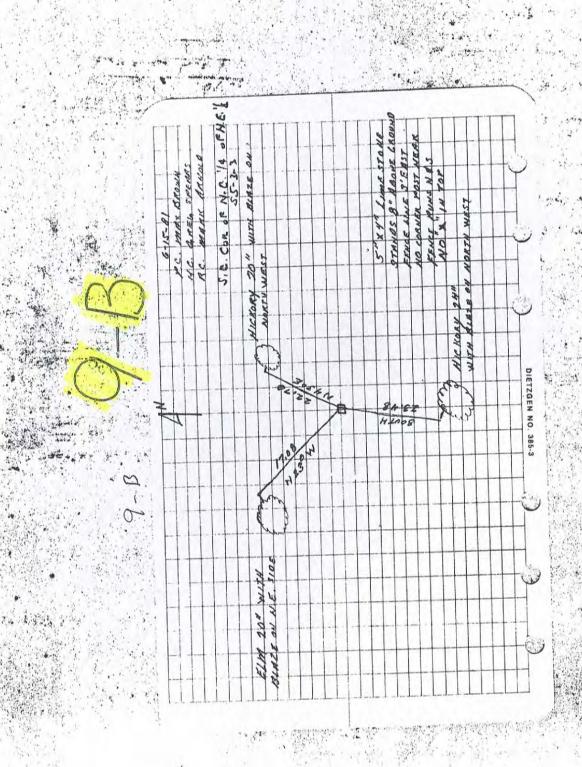

MKM 505/25/06 5/48 CUEME:500 \$	T35 R4E SECTION SOLVER S.17 5.16	17	Exercise (C)	E COL INDIAN	S. Carlotter of the car	1	SI'N N43'E N33'K	53.0' 45.5' 56.0'	3 T35 RAE SECTION CORDER 5.15 5/1	SET # Gx 30 w 34 purp chest S. 21 S. 22 / 47	3   B   - OLD CONG / Buck	0	ECOLUMN TO THE PROPERTY OF THE	
S & S	FIG. 092330 DC	110 = BASE ZM FINED	SET R. OW MARKERS	ALL # 5 x 30" REIGHNS	MARKED WITHIN CLAND		NOTE: 1770 MASIN N-GOLD		148= SET MACHURIN M-13	CHANNEL TO REFUSAL	(a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	Mulbal Pole	23.2, 16.3	

-€ BIG INDIAN ROAD -C TEE ROAD © SEC. 16 ФФ SEC. 21 SECTION CORNER SEC. 16, 17, 20 & 21 T-3-S, R-4-E EX RRS, 0.4' DEEP REFERENCE: I-64 © SEC. 17 ⊙ SEC. 20

PARCEL 910 (3) POPLAR 17" N 33° W 56.0' WALNUT 13" N 43° E 45.5' SUGAR 16" S 1° W 53.0'

@

PAM L. DENTON & PHILLIP S. GINKINS D.R. A-9, PAGE 209 PARCEL 900

0.318 ACRE R.O.W. TOTAL (0.113 ACRE EXISTING R.O.W.) (0.205 ACRE NEW R.O.W.)

28+00

S 2°32'46" W 180.00'

PHILLIP S. GINKINS INST. #200306957

L 40'

T התפים הסים דר 260.99'

HARRISON

COUNTY


CORNER 11-E

TOWNSHIP 3 SOUTH

-EAST 2 ND PRINCIPAL MERIDIAN RANGE 3

	DESCRIP	DESCRIPTION OF	DISTANCE	BEARING				
LOCATION	MONUMENT	REFERENCE	FROM	FROM	DATE	CHECKED	FIELD	REMARKS
			CORNER	CORNER	CHECKED	BY	BOOK	
SW Corner of								
Section 4	aremy "I		-					
	Bar							
	18" Below Pvt.	12" Dia. American Hornbean	50.85	N31-1E	5-4-81	H.B.	#186.22	Sign Placed
		Tree 24" Cedar	33.50	N 84-34E	5-4-81	T.B.		Sign Placed
		Tree						
		Post Marking Cable 5"	3 20.95	S 69-32E.	5-4-81	T.B.		Sign Placed
		Dia.						

EN NO. 385-3

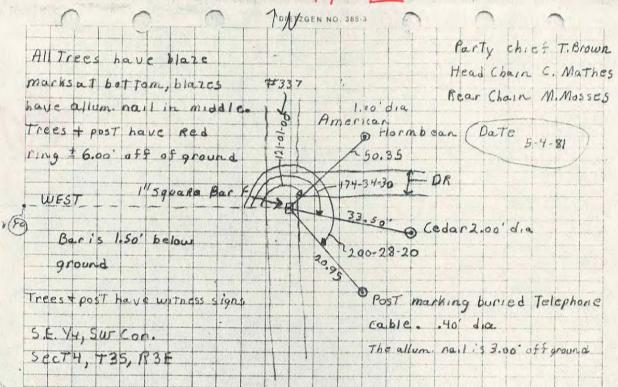

11-E

sest of Water

WARE BURNERS


Harrison Co. No. U-11

 $|- \cup$ 

# T 3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

Quarter Corner to Sections 29 and 33

EXIS	TING SURVEYS
Original Government Survey	Original Evidence Found
Year surveyed _1805 Original monument _Wood Post	
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed By	Year of search 1999 By VHM No evidence recovered.



At time of search:

- 1. Did you have the record description? Yes X No
- How was search area located? pacing, chaining, photo, maps, etc. SURVEYING
- 3. Man hours spent in search N/A
- 4. Do you think additional search might recover evidence? Yes \_\_\_\_\_\_\_No \_X

5. Signature Vit H.M.

Relation of Evidence	to Record Features Along Section Lines
Section line to sections	
Object	
Record Distance	
Measured Distance	

### Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc... Cite source of testimony, If any. Monument is situated 30 feet North of a dry branch.

### Perpetuation Record

Monument and accessories established. Include brief description of area. Set a #5 by 30" steel pin with cap, flush with the ground. Placed a cairn of rocks around monument.

Sugar	Sugar W/nail	Hickory W/nail	Cedar W/nail
19"	12"	18"	16" (dead)
Northeast	N 8° E	N 86° E	S 18° W
	22.2'	20.0'	8.4'

Certified corner restoration certificate prepared Yes \_\_\_\_ No \_\_\_\_ Filed in County records at Survey Book 4, Page 305

N: 1081951.8

ISPCS, East Zone, 1983 Datum (1999)

E: 177066.0

US Survey Foot

# LAND CORNER RECORD (RECTANGULAR SURVEYS)

Harrison Co. No. W-11

11-

T\_3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

Center ¼ Corner to Section 33 and

	EXISTING	G SURVEYS	
Original Government Survey		Original Evider	nce Found
Year surveyed N/A		Year of search	By
Original monument		Monument found	
(wood post, storm, pile of atones, etc.,)			
Bearing Trees			earing Trees Found
Species		Species	AND WILLIAM
Diameter		Diameter	
Bearing		Bearing	
Distance		Distance	
Subsequent Corner Restoration	on	Evidence of Subsequent	Corner Restoration Found
Year surveyed By		Year of search 1999	By_ <u>VHM</u>
Where filed or recorded			
Monument(Original, concrete post, iron rod	, etc)		
Bearing Trees, Reference	Objects		
Species			
Diameter			
Bearing Distance			
Distance			
33	Describe evide	ance	such as roads, fences, , etc Cite source of
	Koau.		
		Perpetuation R	
	The first property of the contract of the cont	l accessories established. I	그래마 그렇게 가게 되었다면서 하지 않는데 하다 하다 하는데 하는데 하는데 하다 하게 되는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하는데 하
		by 30" steel pin with cap, r	ecessed 1/2" below road
At time of search:	surface.	Y 74/154	TTARRES
1. Did you have the record	Utility Pole	Utility Pole	Utility Pole
description? Yes X No	N 40° W		S 22° W
2. How was search area located?	98.4	70.4	23.0°
pacing, chaining, photo, maps,	Mag Nai		Mag Nail
etc. <u>SURVEYING</u> 3. Man hours spent in search N/A	SE face 1.0'		ve N face 1.0' above
7. Man nours spent in search N/A			
4. Do you think additional search might recover evidence? Yes No _X		restoration certificate pre y records at <u>Survey Book 4</u> ISPCS, East Zone, 19 US Survey Foot	4, Page 305


Harrison Co. No. Y-11

1-4

T 3 S R 3 E 2nd Principal Meridian County Harrison State Indiana

South 1/4 Corner to Section 33 and \_\_\_\_\_

EXIS	TING SURVEYS
Original Government Survey	Original Evidence Found
Year surveyed _1805 Original monument _Wood Post	- Rearing
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed By	Year of search 1999 By VHM Recovered 5" by 5" limestone, with a crows foot cut on top and a "+" cut on East face.



At time of search:

- 1. Did you have the record description? Yes X No
- How was search area located? pacing, chaining, photo, maps, etc. <u>SURVEYING</u>
- 3. Man hours spent in search N/A
- Do you think additional search might recover evidence? Yes \_\_\_\_\_

  No \_X\_\_\_\_

5. Signature _	Vit w. My

Relation of Evid	ence to Record Features Along Section Lines
Section line to sections	ADMINISTRAÇÃO DE TORA PROPERTOR A PARA
Object	
Record Distance	
Measured Distance	

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc... Cite source of testimony, If any.

Perpetuation Record

Monument and accessories established. Include brief description of area. Stone left as recovered. Placed a cairn of rocks around monument.

Ash	Red Oak	Black Oak
15"	13"	14"
N 86°W	N 26° E	S 4° E
16.6'	25.4'	22.17
W/Mag Nail	W/Mag Nail	W/Mag nail
1.0' above ground	1.0' above ground	1.0' above ground

Certified corner restoration certificate prepared Yes \_\_\_\_ No \_\_\_ Filed in County records at \_Survey Book 4, Page 305

N: 1076602.6

ISPCS, East Zone, 1983 Datum (1998)

E: 176877.0

US Survey Foot


# HARRISON COUNTY CORNER PERPETUATION RECORD

Section 4, Township 3 South, Range 3 East

Corner Name: Northeast Corner Index: A-13

Monument Type: Railroad Spike Above/Below Grade: 0.20' Below Grade

Coordinate: Northing 1108160.59 Easting 180667.28 Datum: NAD83 IN EAST, US Survey Feet



### PERPETUATION RECORD:

Northeast Corner Section 4, Township 3 South, Range 3 East: A railroad spike was found 0.20' below grade. This monument is shown on surveys by Paul Primavera dated 9/03/1998, 11/28/2000, 03/21/2002, Victor H. McCauley dated 2011, and William P. MaCarty dated 7/15/2016. The origin of this monuments is unknown, however it is locally accepted and has been documented by several local

### Vicinity Reference:


The railroad spike falls at the intersection of Pinaire Lane and Clover Valley Road, +/- 8' south of the northern edge of Pinaire Lane. A treeline extends to the north along the edge of an agricultural field +/- 60' east of the railroad spike.

### CORNER REFERENCE

A.) Utility Pole #UPD2-04-P047 with a Harrison County Witness sign and a mag nail (east face.)

- B.) U-post with a Harrison County Witness sign.
- C.) 5/8" rebar with a McCarty cap flush, a U-post and Harrison County Witness sign was placed on the north side.
- D.) Green Phone Riser Box

NOTE: The bearings to the Corner References were made with a magnetic compass to the center of the referenced object. The distances are horizontal measurements to a mag nail placed perpendicular to the line of measurement, unless noted otherwise.

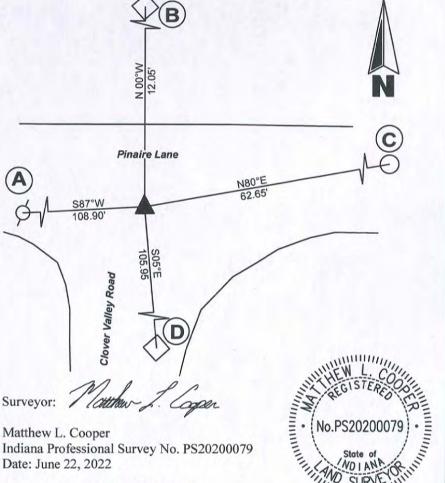



1800 West Main Street, Paoli, Indiana 47454 Phone: 812-723-2900 Email: mcooper@brcjcivil.com

BRCJ Project No. 3-1550

County Surveyor: Harold Klinstiver

Section 4, Township 3 South, Range 3 East

Corner Name: Northeast Corner Index: A-13

Monument Type: Railroad Spike Above/Below Grade: 0.20' Below Grade

Coordinate: Northing 1108160.59 Easting 180667.28 Datum: NAD83 IN EAST, US Survey Feet

## CORNER REFERENCE IMAGES





MONUMENT


Photo looking NORTH



Photo looking SOUTH

## HARRISON COUNTY CORNER PERPETUATION RECORD SECTION DIAGRAM


Section 4 Township 3 South Range 3 East

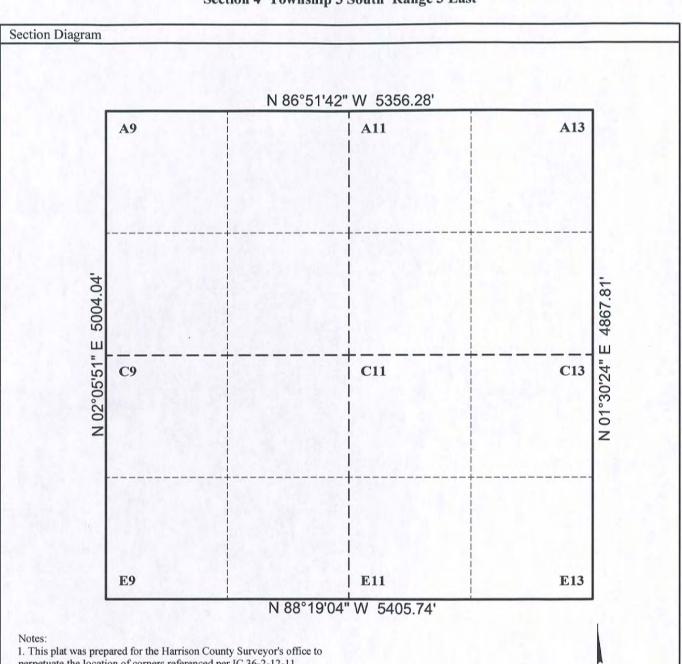

- perpetuate the location of corners referenced per IC 36-2-12-11.
- 2. Basis of Bearings: Grid North (NAD83), Indiana East Zone.
- 3. The distances shown hereon are grid distances. These dimensions are provided as a reference to aid in the recovery of surrounding survey monuments. These measurements are not intended to represent the extent of all quarter corners and quarter-quarter corners, nor should this data be used to calculate boundary lines and corners without verification by a licensed professional surveyor.




13-M

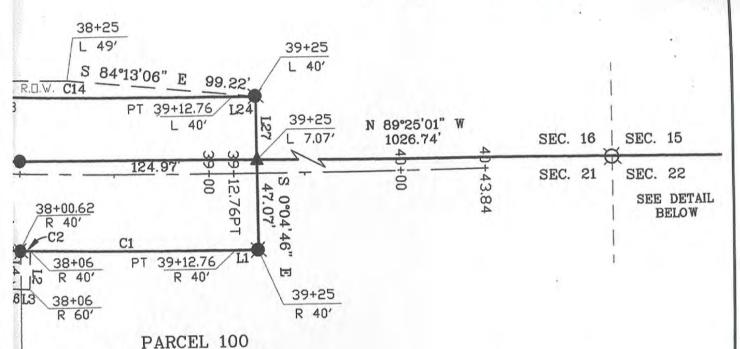

MICHAEL RAY THOMAS, MARY ELLEN BROWN, ROSE MARIE GUNTHER, MARK EDWARD THOMAS

& LEE AUSTIN THOMAS INST. #200205057


0.136 ACRE R.O.W. TOTAL (0.046 ACRE EXISTING R.O.W.) (0.090 ACRE NEW R.O.W.) 0.002 ACRE TEMP. R.O.W. REFERENCE: SECTION CORNER SEC. 15, 16, 21 & 22 T-3-S, R-4-E #6 BY 30" PIN W/3½" CAP

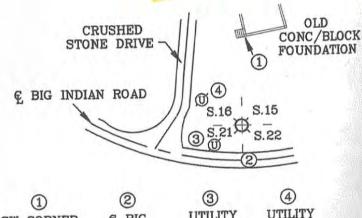

① ② ③ ④

SW CORNER & BIG UTILITY UTILITY
FOUNDATION INDIAN RD. POLE POLE
N 9° E SOUTH S 36° W N 69° W
43.2' 23.2' 16.3' 25.7'

(Uh)

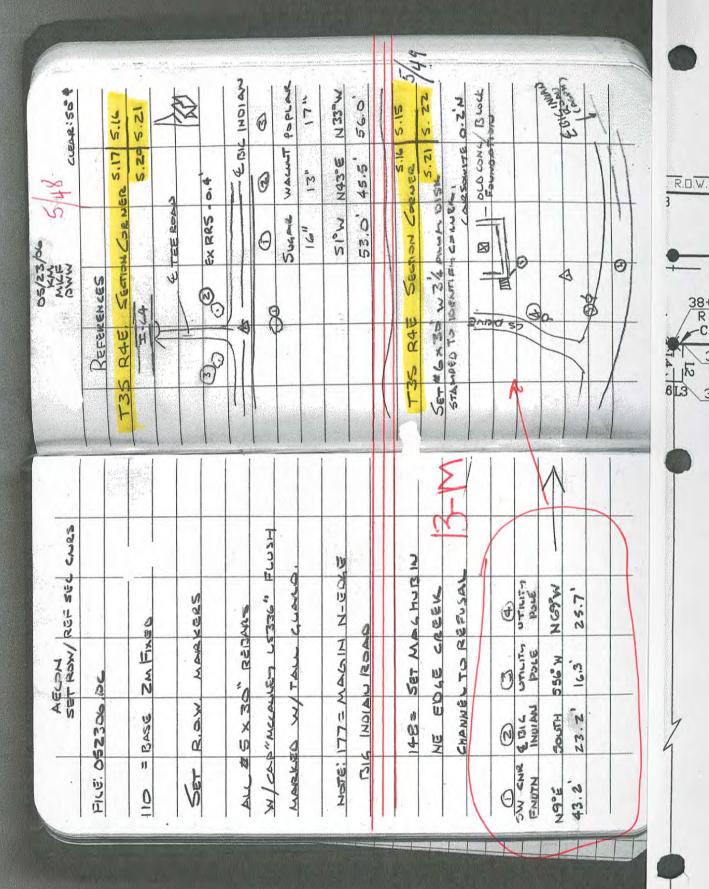

38+00.62 R 40' C2 38+06 R 40' 4 13 12 38+06 R 60'

38 L

S

C14

Harrison County Surveyor's Reference Index Number: Q-13


T 3 S R 3 E 2nd Mer., County Harrison State Indiana


Section Corner common to Sections 21, 22, 27 and 28

#### **EXISTING SURVEYS**

Picture/Sketch

Picture/Sketch

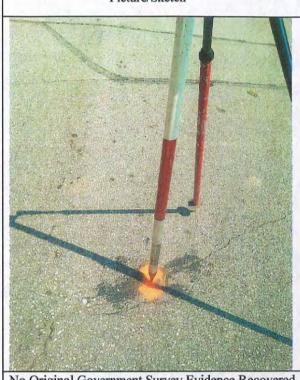




No Original Government Survey Evidence Recovered

Evidence of Subsequent Corner Restoration Found

See survey recorded in Survey Book 1, Pages 292 and 297, Survey Book 3, Page 105 and Instrument Numbers 200311589, 200401098 and 200608041.

Year of search 2017 By VHM Recovered existing railroad spike 0.5' deep, in Gethsemane Road.



Perpetuation Record

Monument and accessories established. Include brief description of area. Set 21/2" magnetic masonry nail in concrete plug over

monument, The corner position is supported by very old and prominent cultural features in the vicinity and by measurements to adjacent corners. Corner accessories established:

Southwestern corner of Modular home, N 52° E, 83.2'.

Poplar, 15", S 40° E, 85.2'.

CMP 15", S 72° E, 11.68', 45 cal. Drill hole in North end.

Stop Sign with Harrison County Surveyor's sign, S 51° E, 23.65'.

N: 1087178.09 E: 179947.20

Signature V. M. M. Date: 07/28/2017

Handet Canslin Serveror 8/6/17

PAGE -

HARRISON

TUNCO

CORNER

TOWNSHIP 3 SOUTH

RANGE 3 EAST 2 ND PRINCIPAL MERIDIAN

	DESCRIP	DESCRIPTION OF	DISTANCE	BEARING				
LOCATION	MONUMENT	REFERENCE	FROM	FROM	DATE	CHECKED	FIELD	REMARKS
			CORNER	CORNER	CHECKED	BY	BOOK	
S.E. Corner of	Stone	24" Dia.Oak	24.20	N 21-16E	6-10-81	T.B.	#1 86.27	Sign Placed
Section 28		6" Maple	5.10	S 5-15W	6-10-81	T.B.		Sign Placed
		29" Oak	16.31	S 44-47W	6-10-81	T.B.		Sign Placed


Sign, I norTh ofground, Stone has a metal All Trees have blaze marks, blazes have a allum, nail in middle of .50x,50 K.50 ouT fence post with @ Oak 2,00 Stone is blaze. Trees have a witness signs, taked ning 85-15-0 maple .50' D 21-15-50 MIETZGEN NO. 385-3 7.56 224-46-50 0a h 2.40 B C. Mathes M. Mosses Party Chief. T. Brown SE. Cor, Sect 28 DATE 6-10-81 above ground Pear Chain Head Chain

Section 3, Township 3 South, Range 3 East

Corner Name: Northeast Corner Index: A-17

Monument Type: 5/8" rebar with BRCJ cap Above/Below Grade: 0.20' Above Grade

Coordinate: Northing 1107935.19 Easting 186109.01 Datum: NAD83 IN East Zone, US Survey Feet



#### PERPETUATION RECORD:

A 5/8" rebar with a BRCJ cap was found 0.20' above grade. This monument was set during a survey by Matthew Cooper dated 9/02/2021, recorded in Instrument Number 202106024.

#### **VICINITY REFERENCE:**

This monument is located at a fence intersection with fence remains extending to the east, west, and southwest. It falls 30' south of an open agricultural field. The area surrounding the monument to the southwest and to the southeast is very brushy with heavy undergrowth.

#### CORNER REFERENCE

A.) 18.7" Sugar Maple with Harrison County Surveyor Witness Sign and mag nail (north face).


B.) 8" Cedar fence post with Harrison County Surveyor Witness Sign and mag nail (north face).

C.) 34.5" Black Oak with fence running through it, and a mag nail (south face).

D.) T-Post is .10' north

E.) Green u-post with a Harrison County Survey Marker Sign is 0.60' south.

NOTE: The bearings to the Corner References were made with a magnetic compass to the center of the referenced object. The distances are horizontal measurements to a mag nail placed perpendicular to the line of measurement, unless noted otherwise.

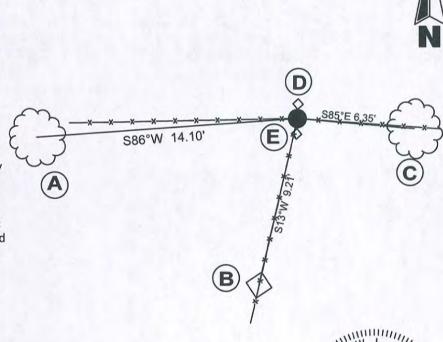



1800 West Main Street, Paoli, Indiana 47454 Phone: 812-723-2900 Email: mcooper@brcjcivil.com

BRCJ Project No. 3-1550

Surveyor: Matthew L. Copper

Matthew L. Cooper Indiana Professional Survey No. PS20200079 Date: June 22, 2022



Section 3, Township 3 East, Range 3 South

Corner Name: Northeast Corner Section 3 Index: A-17

Monument Type: 5/8" rebar with BRCJ cap Above/Below Grade: 0.20' Above Grade

Coordinate: Northing 1107935.19 Easting 186109.01 Datum: NAD83 IN East Zone

### CORNER REFERENCE IMAGES



**MONUMENT** 




Photo looking NORTH



Photo looking SOUTH


# HARRISON COUNTY CORNER PERPETUATION RECORD SECTION DIAGRAM

Section 1 Township 3 South Range 3 East

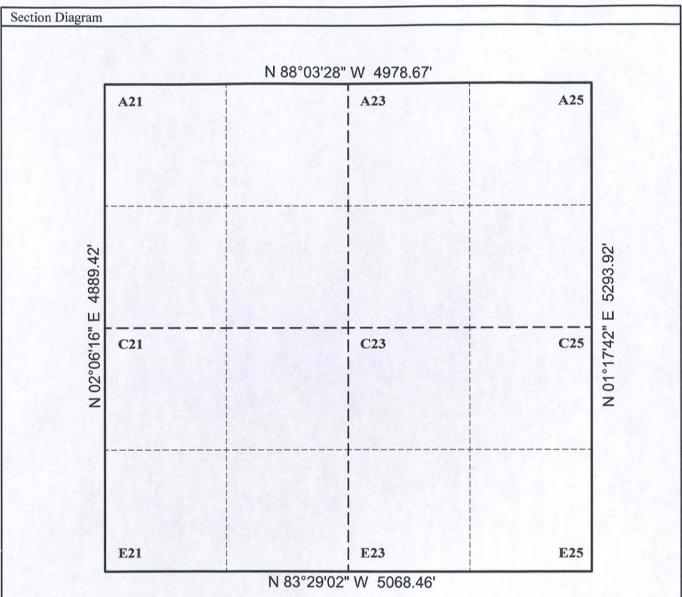

#### Notes

- 1. This plat was prepared for the Harrison County Surveyor's office to perpetuate the location of corners referenced per IC 36-2-12-11.
- 2. Basis of Bearings: Grid North (NAD83), Indiana East Zone.
- 3. The distances shown hereon are grid distances. These dimensions are provided as a reference to aid in the recovery of surrounding survey monuments. These measurements are not intended to represent the extent of all quarter corners and quarter-quarter corners, nor should this data be used to calculate boundary lines and corners without verification by a licensed professional surveyor.






Section 3, Township 3 South, Range 3 East

Corner Name: Southeast Corner Index: E-17

Monument Type: 5/8" Rebar with Aluminum cap Above/Below Grade: 0.10' Below Grade

Coordinate: Northing 1103127.28 Easting 185940.77 Datum: NAD83 IN EAST, US Survey Feet



#### PERPETUATION RECORD:

Southeast Corner of Section 3, Township 3 South, Range 3 East. A mag nail was recovered 1.0' below grade. a 5/8 rebar with a aluminum cap stamped "T3S, R3E S.3, S.4, S.10, S.11" was set above the mag nail to bring the monument up to the surface. The mag nail was shown on surveys by Paul Primavera dated 1/03/2003, and a survey by Matthew Cooper dated 9/02/2021.

#### VICINITY REFERENCE:

Monument falls +/-1' north of Witness Tree Road centerline. A gravel drive is +/-100' west of the monument. A fence corner extending to the north and east is +/-12 north with an agricultural field to the northeast.


#### CORNER REFERENCE

A.) 6" wood post fence corner with a Harrison County Witness sign and mag nail (south face).

B.) 38" Red Oak with a Harrison County Surveyor sign and a mag nail (southwest face.)

C.)4" wood post with Harrison County Witness sign and a mag nail (north face).

NOTE: The bearings to the Corner References were made with a magnetic compass to the center of the referenced object. The distances are horizontal measurements to a mag nail placed perpendicular to the line of measurement, unless noted otherwise.

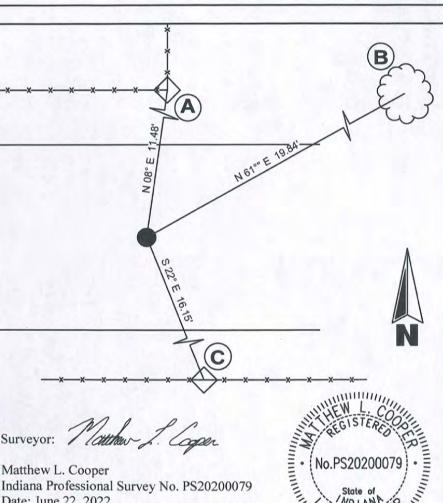



1800 West Main Street, Paoli, Indiana 47454 Phone: 812-723-2900 Email: mcooper@brcjcivil.com

BRCJ Project No. 3-1550

Surveyor: /

Indiana Professional Survey No. PS20200079 Date: June 22, 2022

Section 3, Township 3 South, Range 3 East

Corner Name: Southeast Corner Index:E-17

Monument Type: 5/8" Rebar with Aluminum cap Above/Below Grade: 0.10' Below Grade Coordinate: Northing 1103127.28 Easting 185940.77 Datum:NAD83 IN EAST, US Survey Feet

## CORNER REFERENCE IMAGES





MONUMENT

Photo looking NORTH




Photo looking EAST



Photo looking WEST


## HARRISON COUNTY CORNER PERPETUATION RECORD SECTION DIAGRAM

Section 3 Township 3 South Range 3 East

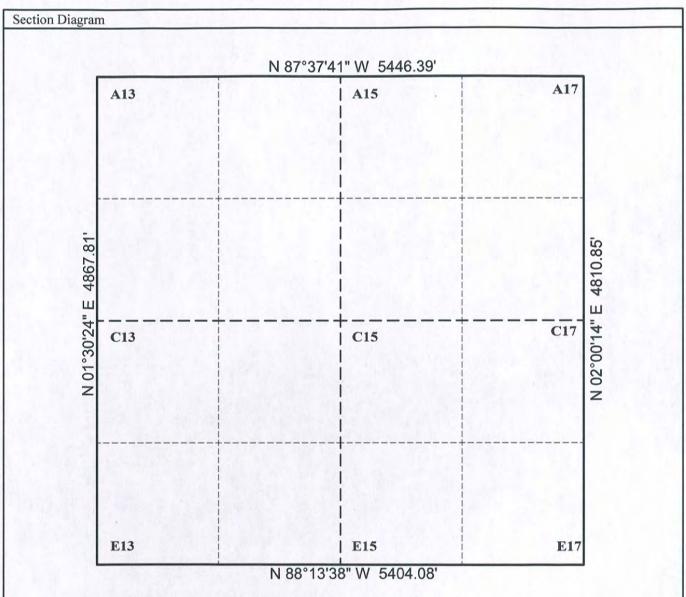

#### Notes

- 1. This plat was prepared for the Harrison County Surveyor's office to perpetuate the location of corners referenced per IC 36-2-12-11.
- 2. Basis of Bearings: Grid North (NAD83), Indiana East Zone.
- 3. The distances shown hereon are grid distances. These dimensions are provided as a reference to aid in the recovery of surrounding survey monuments. These measurements are not intended to represent the extent of all quarter corners and quarter-quarter corners, nor should this data be used to calculate boundary lines and corners without verification by a licensed professional surveyor.



## LAND CORNER RECORD (RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: 17- E

T 3 S R 3 E 2nd Mer., County Harrison State Indiana

Section Corner common to Sections 11 and 10

70.1		
Picture/Sketch		Picture/Sketch
8" CC N 7 E 11.4'	PRNER POST	
½" REBAR FND S 10 E, 16.2' 6"	35" OAK. TREE N45E, 20'	
o Original Government Survey	Evidence Recovered	Evidence of Subsequent Corner Restoration Found
		Year of search 2018 By WPM
		Existing Section Corner Notes  References for:  NW Corner of Section 11
NW Corner Section 11	area. Half inc Ref #1= sign	References for: NW Corner of Section 11  d accessories established. Include brief description of the rebar 0.7 deep in Witness Tree Rd. in East side of 8 in corner post 1 ft up from ground
NW Corner Section 11	area. <u>Half inc</u> Ref #1= sign N 7 Ref #2= sign S 10 Ref #3= sign i	References for: NW Corner of Section 11 d accessories established. Include brief description of the rebar 0.7 deep in Witness Tree Rd.