


# HARRISON COUNTY CORNER REFERENCE

TOWNSHIP 5 SOUTH RANGE 3 EAST

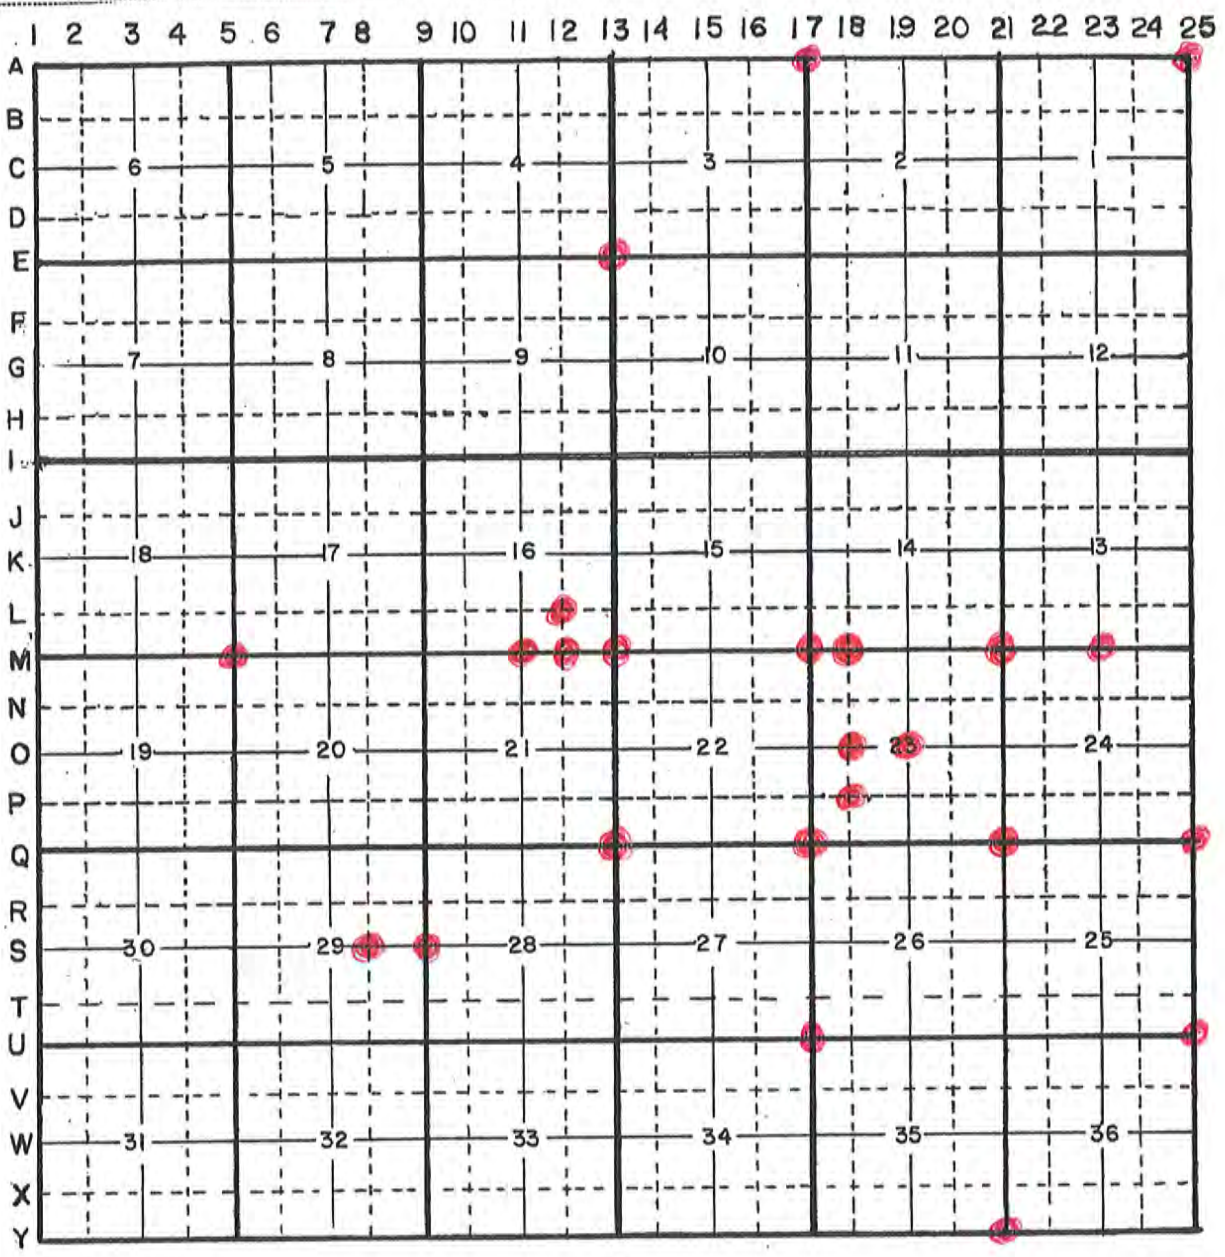

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County No. M-5 **5-m**  
 T 5 S R 3 E 2nd Mer., County Harrison State Indiana  
 Section Corner common to Sections 17, 18, 19 and 20

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
See surveys recorded in Survey Book 3, Pages 12, 13 373 and 655, Survey Book 4, Pages 186 and 635 and Instrument Numbers 200805092 and 200903746.	N/A
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small>  Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	Year of search <u>2014</u> By <u>VHM</u> <u>Recovered Railroad Spike 0.5' deep. Set road nail over monument.</u>
<div style="border: 1px solid black; padding: 5px; text-align: center;"> </div>	<p style="text-align: center;"><b>Perpetuation Record</b></p> Monument and accessories established. Include brief description of area. <u>The monument was left in place as recovered. The monument is situated near centerline of ValleyCity-Mauckport Road and a crushed stone drive to West. Corner accessories established.</u> <u>Utility Pole, S 29° E, 33.68' to mag nail 0.7' up in Southwest side.</u> <u>Walnut, 18" w/wire, N 62° W, 32.7', with Harrison County Surveyor's sign.</u> <u>Telephone Pedestal, S 35° E, 29.3'.</u> <u>Elm, 12", N 57° E, 25.8', unmarked.</u> <u>East end of 24" CMP, N 39° E, 19.13', 45 cal. hole near East end of pipe.</u>
Signature: <u>Keith H. M...</u> Date: <u>10/08/2014</u>	N: 1029045.45 E: 167845.77  <u>Harold K. Lintner 2014</u>

HARRISON

UNTY

8-5

CORNER 8-S

TOWNSHIP 5

RANGE 3

EAST 2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.W. Corner S.E. 1/4, N.E. 1/4 Section 29 (29)	Axle	0.50 Ø Ash	18.62	N27-50-58E	3-7-90	T.B.	# 4Pg.3	Sign Placed
		2.5 Ø D.Ash	15.85	S34-48-22E	3-7-90	T.B.		Sign Placed
		.85' Ø Oak	25.65	S65-47-18W	3-7-90	T.B.		Sign Placed

8-5

DIETZGARDEN No. 385-3

( 8-5

All Trees have a blaze with aluminum in middle, for witness sign

3-7-90

AXLE is 1.0' out of ground & is marked with a metal post & sign

0.50 Ø ASH, nail on west side 1.0' up.

N27-50-30E 18.62

~~S65-47-18W 25.65~~

AXLE

Ø 1.85' Ø Oak, nail on south side 1.10' up.

S34-48-22E 15.85

Party Chief T. Brown  
Head Chain R. Crane

Ø 2.5' Ø double ASH, nail on east side 1.45' up.

Rear Chain V. Behlback

SUR COR. S E 74, N E 74

SECTION 29 T 55, R 3E

HARRISON

COUNTY

COPNER 9-S

TOWNSHIP 5

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

9-S

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.E. Cor. N.E. ¼, Section 29,	Stone	1.90 ØMaple	41.77	N26-28-40W	3-7-90	T.B.	#4 Pg.4	Sign Placed
		Barn	57.60	N72-17-50E	3-7-90	T.B.		
		Barn	59.50	S71-59-0E	3-7-90	T.E.		

9-5

9-5

DIETZGEN No. 385-3

3-7-90

The tree has a blaze  
with a reflection  
fall in middle of  
a witness tree

N 24-13-00 W 41.77

Stone is 40 x 40 x 60

out of ground  
stone is marked

N 72-17-50 E 57.60

with a metal post

stone

S 71-59-0 E 59.50

+ sign

bar


Party Chief T. Brown

Head Chain R. Crane

Rear Chain V. Gehlbach

SE. Cor. NE 1/4

SECTION 29 T 55, R 3 E

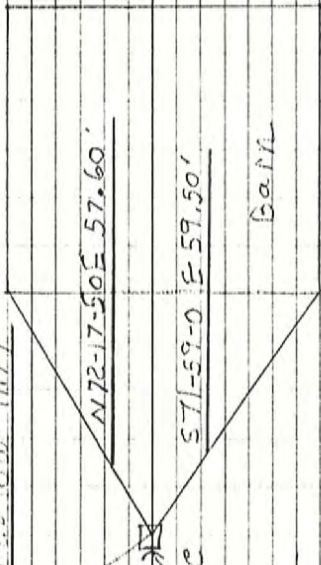

HARRISON

COUNTY

CORNER 11-M

TOWNSHIP 5

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

11-M

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.W. CORNER S.E. 1/4, Sec. 16	Stone #5 F	0.5' Ø Maple	17.70	N56-55-40E	3-6-90	T.B.	# 4 Pg. 1	Sign Placed
		0.65' Ø Maple	13.15	S30-34-40W	3-6-90	T.B.		Sign Placed
		1.60' Ø Poplar		West 26.65	3-6-90	T.B.		Sign Placed

11-M

DIET # 385-3

11M

STONE IS 30x50x70 out of ground. Came to a point. Stone is marked with a metal post & sign. a #5 Rebar was found next to the stone

All trees have a blaze with a aluminum nail in middle. Fence lines are trees to tree post shaped 0.5' D maple, nail is on north side & 1.30' up.

WEST 26.65

160' D poplar, nail is on south side & 1.40 up

STONE # 5 F

SW Cor. SE 1/4 Sec 7 16 T 55, R 3E  
S 30-34-40 W 13, 15

0.65' D maple, nail is on east side & 1.20 up.

3-6-90

Party Chief, T. Brown.  
Head Chain R. Crane  
Rear Chain V. Schiback



HARRISON COUNTY

12-L  
 CORNER 12-L TOWNSHIP 5 SOUTH RANGE 3 EAST 2 ND PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
N.W. Corner S.E. 1/4, S.E. 1/4, Section 16	Stone	11" Gum	18.95	N10-30'E	10-20-84	T.B.	#2 Pg.60	Sign Placed
		11" Maple	1.00	South	10-20-84	T.B.		Sign Placed
		9" Maple	23.55	N89-0-0W	10-20-84	T.B.		Sign Placed

DIETZEN NO. 385-3

Date 10-20-24

NW Cor. SE4, SE4  
Sec. 16, T55, R3E

↑ NORTH

① .90 & Com. nail on East  
side & 1.80 up.  
18.95'  
110°-00'

② .90 & maple nail on East  
side & 1.80 up.  
23.55'

③ .90 & maple nail on South  
side & 1.50 up.  
1.00'

All trees have a blaze  
with a aluminum nail  
in middle. All trees  
have a witness sign.

Stone is .50 x .50 x 1.00 out of  
ground. Stone is marked  
with a #5 rebar.

Party Chief T. Brown  
Head Chain R. Clements  
Rear Chain D. Skaggs

12-L

12-L

COUNTY

HARRISON

RANGE 3 EAST 2 ND PRINCIPAL MERIDIAN

TOWNSHIP 5 SOUTH

CORNER 12-M

12-M

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.W. Corner S.E. 1/4, S.E. 1/4 Section 16	Stone	16" Maple	1.85	East	10-20-84	T.B.	#2 Pg. 61	Sign Placed
		Corner Post	1.40	North	10-20-84	T.B.		Sign Placed
		Fence Post	10.88	S1-0-0E	10-20-84	T.B.		Sign Placed


12-M

DIETZEN NO. 385-3


12M

The tree has a flag  
with a blue ring  
in the center  
sign & a blue ring  
around it

NORTH: SW cor, SE 1/4, SE 1/4  
Sec 16, T85, R3E

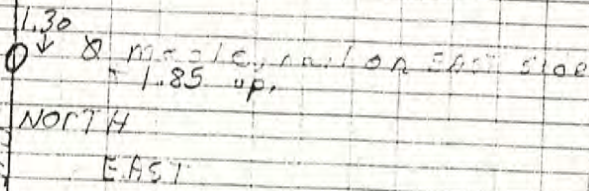

Stems 8.80 x .50 x 2.00  
cut & preserved  
marked with a tag

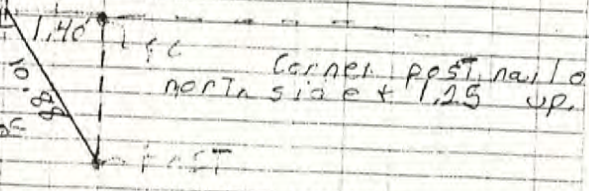

Party Chief T. Brown  
Head Chain A. Clements  
Bear Chain D. Slaggs

Corner post, nail on  
north side & 1.25 up  
Fence post, nail on  
west side & 2.75 up

Date 10-30-84

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County No. E-13

13-E

T 5 S R 3 E 2nd Mer. , County Harrison State Indiana

Section Corner common to Sections 3, 4, 9 and 10

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
<p>Note: Original notes indicate that Township was divided non-typical, from North to South.</p>	<p>No Photo</p>
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
<p>Year surveyed _____ By _____                      Where filed or recorded _____                      Monument _____  <small>(Original, concrete post, iron rod, etc...)</small></p> <p style="text-align: center;">Bearing Trees, Reference Objects</p> <p>Species _____                      Diameter _____                      Bearing _____                      Distance _____</p>	<p>Year of search <u>2014</u> By <u>VHM</u>  <u>Recovered P.K. nail. Replaced nail with #5 X 12" set 0.6' deep and placed mag hub in concrete plug over monument.</u></p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> </div>	<p style="text-align: center;"><b>Perpetuation Record</b></p> <p>Monument and accessories established. Include brief description of area. <u>The monument is situated 9 feet South of North edge of pavement of Heth-Washington Road. Cultivation to the North, yard to Southeast and cultivation to Southwest, 58 feet West of West side of Residence #2985, 15 feet West of centerline of crushed stone driveway to South.</u></p> <p>Corner accessories established:  <u>Telephone Pedestal, N 80° E, 95.20'.</u>  <u>Wood Fence Post, South, 31.95' to mag nail 0.3' up in West side.</u>  <u>#5 pin (origin unknown), South 19.13'</u></p> <p>N: 1039308.88                      E: 178679.97</p> <p>N: 1033270.74 {NGS Station Creek                      E: 196603.30 {</p>
<p>Signature <u>V.H.M.</u>                      Date: <u>10/08/2014</u></p>	<p><u>Harold K. Kristensen 2014</u></p>


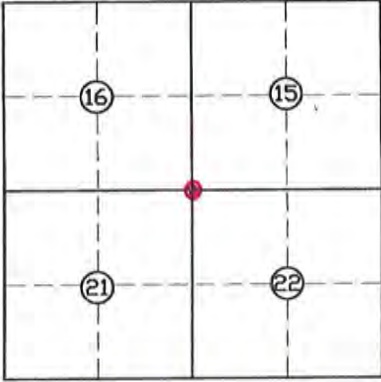
LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: M-13

13-M

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Section Corner common to Sections 15, 16, 21 and 22

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
<p>See surveys recorded in Survey Book 3, Pages 365 &amp; 671 and Survey Book 4, Page 232 &amp; 635.</p>	
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
<p>Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small></p> <p style="text-align: center;">Bearing Trees, Reference Objects</p> <p>Species _____ Diameter _____ Bearing _____ Distance _____</p>	<p>Year of search <u>2015</u> By <u>VHM</u> Recovered nail in "T" intersection of Rippendan Valley Road and Squire Boone road. Monument is 2' North of South edge of pavement of Squire Boone Road and 4' East of East edge of pavement of Rippendan Valley Road.</p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">  </div> <p>Signature <u>V.H.M.</u> Date: <u>11/02/15</u></p>	<p style="text-align: center;">Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Set #5 by 0.8' steel pin, recessed 0.6' below driving surface with 60d mag hub set in concrete flush over deep reading. Corner accessories established:</u>  <u>Stop Sign/Street Sign, with Harrison County Surveyor's sign, N 61° E, 53.85'.</u>  <u>Sandstone outcrop with "+" mark, S 80° E, 32.53'.</u>  <u>Utility Pole with Harrison County Surveyor's sign, S 45° W, 32.7', MN + 0.6' on CE side.</u>  <u>Utility Pole (6D11), S 72° W, 22.41', MN + 0.6' on SE side.</u>  <u>Carsonite witness post, West, 22.7'.</u></p> <p>N: 1028673.4 E: 178424.0</p>


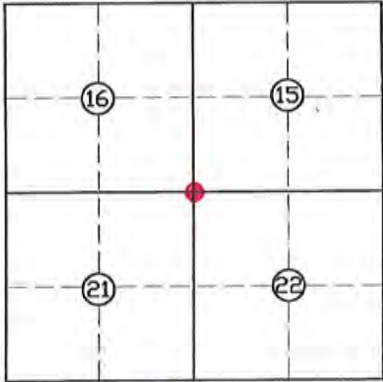
LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: M-13

13-M

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Section Corner common to Sections 15, 16, 21 and 22

EXISTING SURVEYS	
<p>No Original Government Survey Evidence Recovered</p>	<p>Picture/Sketch</p>
<p>See surveys recorded in Survey Book 3, Pages 365 &amp; 671 and Survey Book 4, Page 232 &amp; 635.</p>	
<p>Subsequent Corner Restoration</p>	<p>Evidence of Subsequent Corner Restoration Found</p>
<p>Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small></p>	<p>Year of search <u>2015</u> By <u>VHM</u> Recovered nail in "T" intersection of Rippendan Valley Road and Squire Boone road. Monument is 2' North of South edge of pavement of Squire Boone Road and 4' East of East edge of pavement of Rippendan Valley Road.</p>
<p>Bearing Trees, Reference Objects</p> <p>Species _____ Diameter _____ Bearing _____ Distance _____</p>	
	<p>Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Set #5 by 0.8' steel pin, recessed 0.6' below driving surface with 60d mag hub set in concrete flush over deep reading. Corner accessories established:</u></p> <p><u>Stop Sign/Street Sign, with Harrison County Surveyor's sign, N 61° E, 53.85'.</u></p> <p><u>Sandstone outcrop with "+" mark, S 80° E, 32.53'.</u></p> <p><u>Utility Pole with Harrison County Surveyor's sign, S 45° W, 32.7', MN + 0.6' on CE side.</u></p> <p><u>Utility Pole (6D11), S 72° W, 22.41', MN + 0.6' on SE side.</u></p> <p><u>Carsonite witness post, West, 22.7'.</u></p> <p>N: 1028673.4 E: 178424.0</p>
<p>Signature <u>Vik H. M</u></p> <p>Date: <u>11/02/15</u></p>	

HARRISON

COUNTY

13-Q

COPNER 13-Q

TOWNSHIP 5

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.W. Corner Section 22	1" Pipe F, # 4 Rebar	1.50' Ø Locust	45.12	N75-07-20E	3-14-90	T.B.	#4 Pg. 2	Sign Placed
		1.50" Ø Locust	24.26	S14-18-20W	3-14-90	T.B.		Sign Placed
		0.90' Ø Cedar	40.41	N19-11-40W	3-14-90	T.B.		Sign Placed



13-Q

DRETZGEN NO. 385-3

( 13Q

↑ N  
 1" PIPE F, PLACED a #4  
 BEAR NEXT TO IT. PIC  
 WAS 1.5' BELOW SURFACE  
 OF NO. 0.90" CEDAR, NAIL IS ON  
 EAST SIDE 1.10' UP  
 9-14-90 M19-11-40W-10.11  
 ALL TREES HAVE A BLAZE  
 WITH AN ALUMINIUM IN  
 MIDDLE. ALL TREES HAVE  
 A WITNESS SIGN.  
 1.50" LOCUST, NAIL IS  
 ON NORTH SIDE 1.22' UP.  
 N75-07-20E 45.12

PIPE F


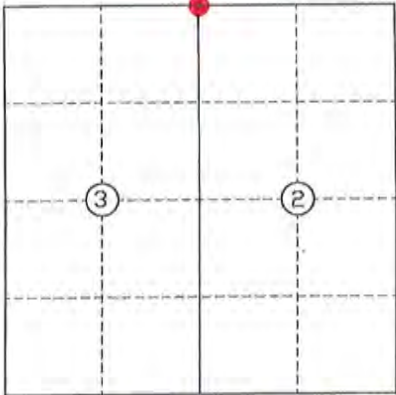
PATTY COLE T. BREWER  
 HERB SHALE. R. COANE  
 BEAR CHAIN V. Gohlbesch  
 SW COR. SECT. 22  
 T 55, R 3E  
 1.50" LOCUST, NAIL IS ON WEST SIDE  
 1.20' UP.  
 514-18-20W 24.26

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County No. A-17 **17-A**

T 5 S R 3 E 2nd Mer. , County Harrison State Indiana

North Section Corner common to Sections 2 and 3

EXISTING SURVEYS	
<p>No Original Government Survey Evidence Recovered</p> <p>Note: Original notes indicate that Township was divided non-typical, from North to South.</p>	<p>Picture/Sketch</p> 
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
<p>Year surveyed _____ By _____</p> <p>Where filed or recorded _____</p> <p>Monument _____ <small>(Original, concrete post, iron rod, etc...)</small></p> <p style="text-align: center;">Bearing Trees, Reference Objects</p> <p>Species _____</p> <p>Diameter _____</p> <p>Bearing _____</p> <p>Distance _____</p>	<p>Year of search <u>2014</u> By <u>VHM</u></p> <p><u>Recovered railroad spike, 0.7' deep with road nail 0.2' deep over railroad spike. Set mag hub in concrete plug over monument.</u></p>
	<p style="text-align: center;">Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>The monument was left in place as recovered. The monument is situated 7 feet South of North edge of payment of Harrison-Heth Road, Fence "T" post to North, 30 feet West of West end/edge of residence #1975. Corner accessories established:</u></p> <p><u>Utility Pole Guy Pole, N 5° W, 17.50', bottom nail of Harrison County Surveyor's sign.</u></p> <p><u>Flush Hydrant, S 13° W, 16.93', top of center.</u></p> <p><u>East Gate Post, S 63° E, 39.30' to mag nail 1.0' up in South side.</u></p> <p><u>Utility Pole with transformer, S 29° W, 16.15' to mag nail 1.0' up in East side.</u></p> <p>N: 1044393.99 E: 184172.49</p>
<p>Signature <u>Vit H.M.</u></p> <p>Date: <u>10/08/2014</u></p>	<p><i>Howell K. Luster 2014</i></p>

HARRISON

TY

COPNER M-17

TOWNSHIP 5 S

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
Common Corner 14-15-22-23	Mag. Nail	22" Cedar	63.8'	North	2/07	TOB	5/84	
		NW Corner of House	44'	S 20 E	2/07	TOB	5/84	
		Util. Pole w/Sign	28.3'	S 33 W				

17-M


2/09/07

17-M

5 3

SEC CORNER 14, 15, 22, 23 TSS RISE

EX MARK OVER

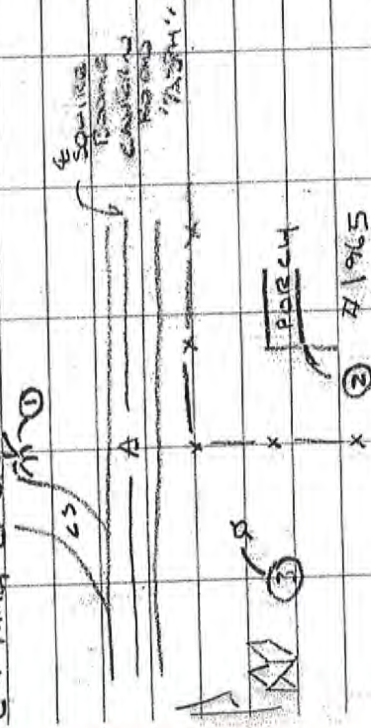

① CEDAR 22" NORTH 52.0E 63.8' 44.0' \* MKS 2150 1-0-1966

② NW COR UP HOUSE 53.3' W 28.3'

③ 7-1965

KM MARK OVER


25

25

5 3

W 1/16 CORNER 5 4, 23 TSS RISE

SET NAIL OVER RAIL SPICE

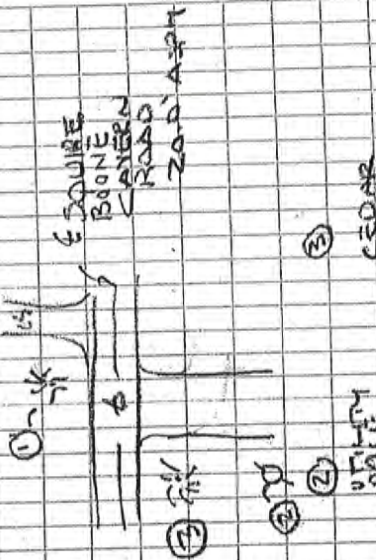

① CEDAR 20" N 5° E 15.7'

② UTILITY POLE F7.23 S 6° W 52.4' \* BT 10 1489

③ CEDAR 14" S 34° W 29.7'

See Survey Book 2 Page 364

HARRISON COUNTY

17-Q

CORNER 17-0 TOWNSHIP 5 RANGE 3 EAST 2ND PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.W. CORNER SECTION 23		STONE IS CUT OF GROUND AND MARKED WITH A METAL POST AND SIGN						
		1.05 BEECH	25.75	N45-12-0E	5-12-95	T.B.	#4 Pg71	SIGN PLACED
		1.15 Beech	20.80	S66-38-0E				SIGN PLACED
		0.73 Maple	15.2	N55-29-0W				sign placed

17-Q

17Q


Party Chief T. Brown  
Head Chain M. Woodard  
Rear Chain W. STONES

Ø.73 Ø maple, nail on  
NORTH side + 1.9' up.

N55-29-0W 15.2'

Stone is 0.50 x 0.40 x  
1.10 out of ground. Stone  
is marked with a metal Post  
+ Sign.

All Trees have a blaze with a  
alluminium in middle, All Trees  
have a witness sign



1.05' Ø beech, nail on  
N.W. side + 1.7' up

DATE 5-12-95

N 45-12-0E 25.75

STONE

S 66-38-0E 20.70

1.15 Ø beech, nail  
on North side +  
1.3' up.

S.W. CORNER SECT.  
23 T 55 R 3E

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: U-17 **17-U**

T 5 S R 3 E 2nd Mer. , County Harrison State Indiana

Section Corner common to Sections 26, 27, 34 and 35

EXISTING SURVEYS	
<p>No Original Government Survey Evidence Recovered</p>	<p>Picture/Sketch</p>
<p>See surveys recorded in Survey Book 3, Page 93 and 416, Survey Book 4, Page 234 and Survey Book 6, Page 157.</p>	<p>No Photo Available.</p>
<p>Subsequent Corner Restoration</p>	<p>Evidence of Subsequent Corner Restoration Found</p>
<p>Year surveyed _____ By _____            Where filed or recorded _____            Monument _____  <small>(Original, concrete post, iron rod, etc...)</small></p> <p style="text-align: center;">Bearing Trees, Reference Objects</p> <p>Species _____            Diameter _____            Bearing _____            Distance _____</p>	<p>Year of search <u>2015</u> By <u>VHM</u>            Recovered <u>#5 pin, 1.0' deep in "T" intersection of Overlook Road and Honeysuckle Lane, 4½' North of South edge of pavement and 4' West of centerline of Honeysuckle Lane.</u></p>
<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> </div>	<p style="text-align: center;">Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Set mag hub in concrete plug over monument. Corner accessories established:</u>  <u>Guy Pole, N 40° W, 41.24', MN + 1.0' on Northeast side.</u>  <u>Utility Pole, N 31° E, 36.32' with Harrison County Surveyor's sign. bottom nail</u>  <u>Guy Pole, S 49° E, 26.45', MN + 1.0' on Southwest side.</u></p> <p>N: 1017805.7            E: 183292.8</p>
<p>Signature <u>Vick H. M.</u></p> <p>Date: <u>11/02/15</u></p>	

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: U-17

17-U

T 5 S R 3 E 2nd Mer. , County Harrison State Indiana

Section Corner common to Sections 26, 27, 34 and 35

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
<p>See surveys recorded in Survey Book 3, Page 93 and 416, Survey Book 4, Page 234 and Survey Book 6, Page 157.</p>	<p>No Photo Available.</p>
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
<p>Year surveyed _____ By _____            Where filed or recorded _____            Monument _____  <small>(Original, concrete post, iron rod, etc...)</small></p> <p style="text-align: center;">Bearing Trees, Reference Objects</p> <p>Species _____            Diameter _____            Bearing _____            Distance _____</p>	<p>Year of search <u>2015</u> By <u>VHM</u>            Recovered <u>#5 pin, 1.0' deep in "T" intersection of Overlook Road and Honeysuckle Lane, 4½' North of South edge of pavement and 4' West of centerline of Honeysuckle Lane.</u></p>
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> </div> <p>Signature <u>Vick H. M</u>            Date: <u>11/02/15</u></p>	<p style="text-align: center;"><b>Perpetuation Record</b></p> <p>Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Set mag hub in concrete plug over monument. Corner accessories established:</u>  <u>Guy Pole, N 40° W, 41.24', MN + 1.0' on Northeast side.</u>  <u>Utility Pole, N 31° E, 36.32' with Harrison County Surveyor's sign. bottom nail</u>  <u>Guy Pole, S 49° E, 26.45', MN + 1.0' on Southwest side.</u></p> <p>N: 1017805.7            E: 183292.8</p>



HARRISON

TY

18-M

CORNER M-18 TOWNSHIP 5 S RANGE 3 EAST 2ND PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
W 1/16 Corn. Sec. 14 & 23	Nail/RR Spike	20" Cedar	15.7'	N 5 E	2/07	5/83		
		Util. Pole	52.4	S 6 W				
		14" Cedar	29.7	S 34 W				

2/09/07

M-17

5 3

SEC CORNER 14, 15, 22, 23 TSS PSE

EX NAIL OVER



- ① CEDAR 22" NORTH 52°SE 44.0' 63.8'
  - ② NW COR UP HOUSE 53.3'W 28.3'
  - ③ PORCH 7/1965
- # MGS SIGN 1.0' DIA

2/09/07

M-18

5 3

W 1/6 CORNER 5, 4, 23, TSS PSE

SET NAIL OVER RAIL SPIKE



- ① CEDAR 20" N57E 15.7'
- ② UTILITY POLE F7.23 S64W 52.4' \* BT 10' \* MGS
- ③ CEDAR 14" S34W 29.7'

18-M

25

See Survey Book Z Page 364

HARRISON

COUNTY

18-0

CORNER 18-0 TOWNSHIP 5 RANGE 3 EAST 2ND PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S. E. CORNER S. W. 1/4, N. W. 1/4 SECTION 23								
	#4 REBAR MARKED WITH METAL POST & SIGN		12.80	N76-35-0E	5-12-95	T. B.	#4 Pg70	SIGN PLACED
		40. DOGWOOD						
		50. DOGWOOD	9.90	S66-25-0E				SIGN PLACED
		50 DOGWOOD	20.30	S31-35-0W				SIGN PLACED

18-0

180

All Trees have a blaze with a aluminum nail in middle. All Trees have a witness sign.

#4 Rebar is marked with a metal Post & sign

Date 5-12-95

0.40' dog wood, nail on east side & 1.6' up.

N 76-35-0E 12.80'

#4 Rebar


S 66-25-0E 7.90'

S.E. Cor. SW 1/4 - NW 1/4, Sect 23 T55 R3E

0.50' dog wood nail on south side & 1.5' up.

0.50' dog wood, nail on west side & 1.4 up.

Party Chief T. Brown  
Head Chain M. Woodard  
Rear Chain V. Stokes

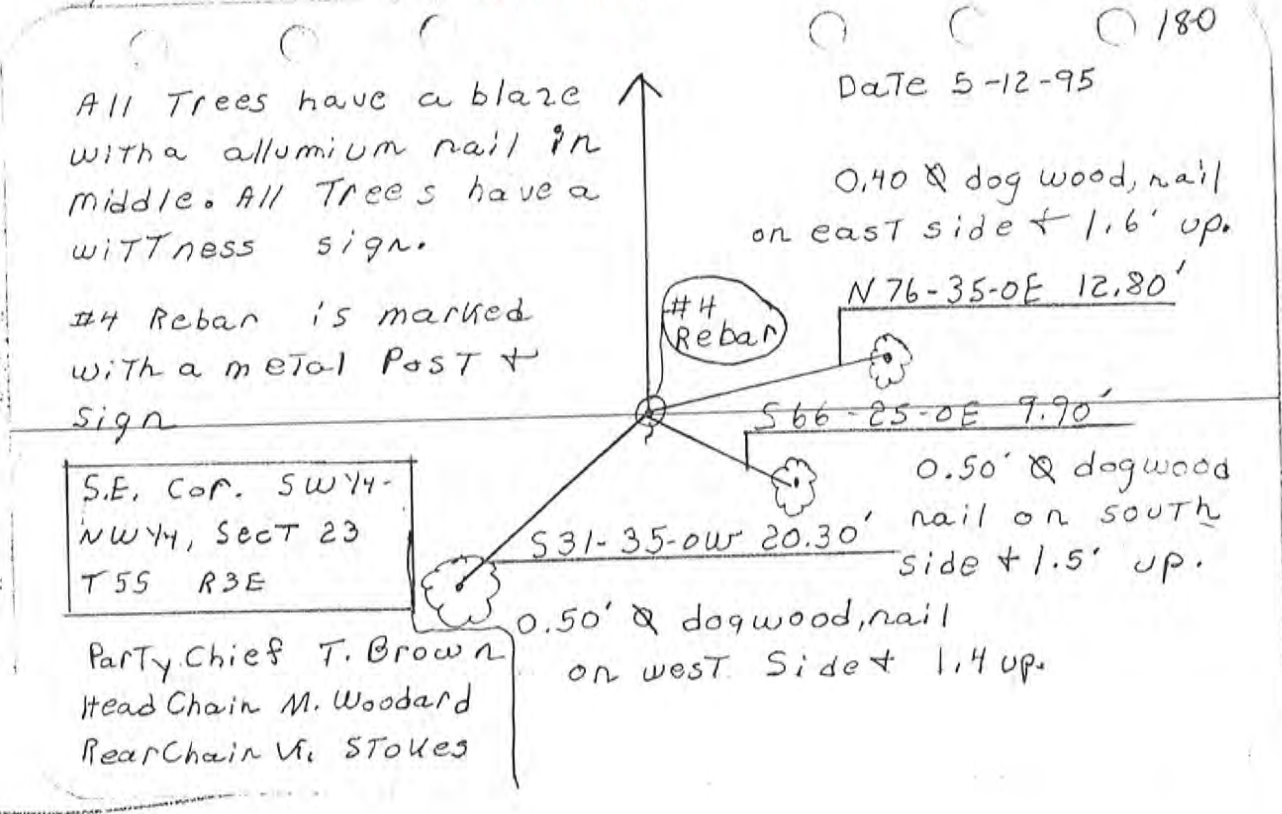

HARRISON

COUNTY

CORNER P-18

TOWNSHIP 5 S

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

18-P

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
SW 1/16 Corner Sec. 23	Limestone w/T-Post .3' W	12" Black Oak	18.8'	N 14 W	2/07	TOB	5/85	
		Brace Post 6"	26.5'	S 36 E				
		18" Oak w/HCS Sign	12.1'	S 44 W				



HARRISON COUNTY

19-0

CORNER 19-0 TOWNSHIP 5 RANGE 3 EAST 2ND PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.E. N.W. $\frac{1}{4}$ Section 23	STONE IS OUT GROUND MARKED WITH A #4 REBAR							
		0.73 CEDAR	24.10	N59-57-0E	5-12-95	T.B.	#4 Pg72	SIGN PLACED
		0.73 BEECH	25.0	S67-19-0W				SIGN PLACED
		0.70 BEECH	17.35	N8-01-0W				SIGN PLACED

19-0

19-0

0.70" beech, nail on west side + 1.70' up.

Party Chief T. Brown  
Head Chain M. Woodard  
Rear Chain K. Stokes

2.30" oak

567-19-0W 25.0'

0.73" beech,  
nail on north  
side + 1.80' up.

Stone is 0.30 x 0.60 x 0.20  
out of ground. Stone is  
marked with a #4 rebar.

N

Date 5-12-95

SE NW 1/4 Sect 23  
T55 R3E

N 8-01-0W 17.35'

0.73" cedar  
nail on south side  
+ 1.80' up.

N 59-57-0 E 24.10'

All trees have a blaze with  
a double head 16 penny nail. All  
trees have a witness sign.  
The tree at the stone is  
growing over top of it.



HARRISON

CITY

CORNER 21-M

TOWNSHIP 5

RANGE 3

EAST

2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
Sec. Corner 13-14-23-24	Mag. Nail Hub/PK Nail	8" Cedar	42.6'	S 61 W	2-07	TOB	5/82	
		U. Pole w/HCS Sign	54.8'	N 76 W				
		Edge of Squire Boone Road	7.0'	South				

21-M

2/09/07

P-18


5 3

SW 1/4 CORNER TO S 23 T 55 R 3E.

EXISTING LIMESTONE SCHMIDT SOLID

IN CIRCUITS ORIENTED

SET I-POST 0.3 W

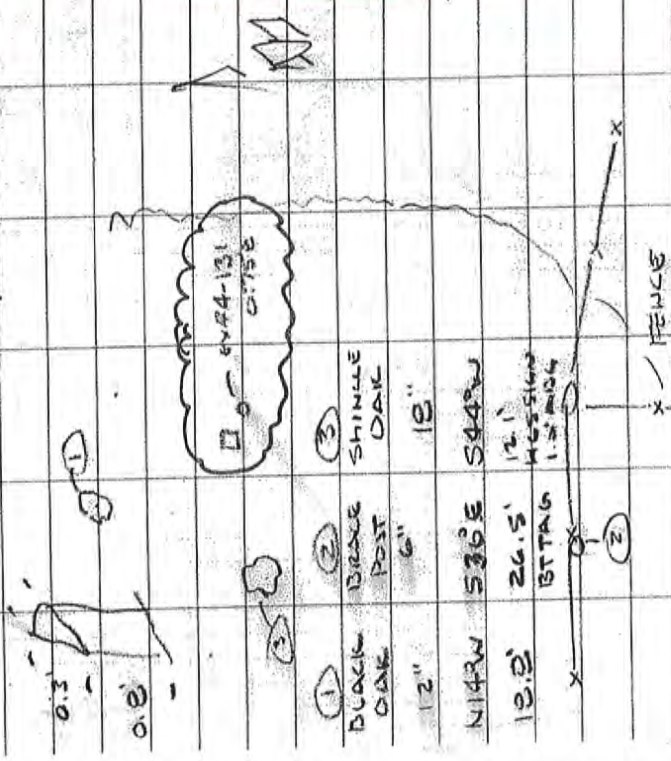

- ① BLACK BIRCH POST OAK 12"
- ② BRACE POST OAK 6"
- ③ SHINGLE OAK 18"
- N14W 536E S44W
- 18.2' 26.5' 12.1'
- BTTAG HCS 1.5" 1.5" 1.5"

ROADS

See SB 2 X 387

PASTURE

2/12/07

See SB 2 X 364


M-21

21-M

27

See Line 13, 14, 23, 24 T5S R3E

SET 60S MAG - HUB 0.16 - 0.16

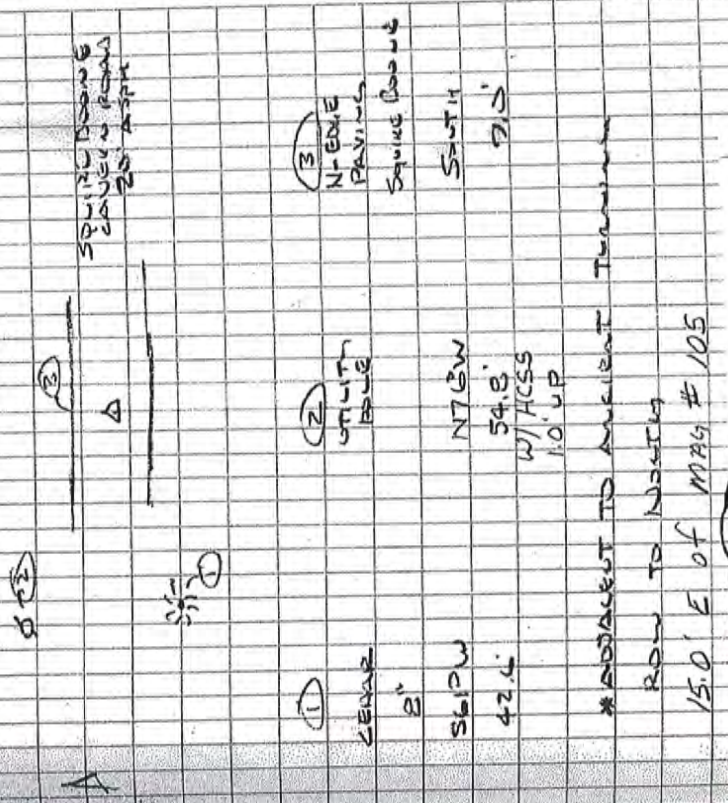

- ① 2" 8" 561PW 42.6'
- ② WITH IRON
- ③ N-EDGE PRAYING SQUARE BOARD
- N76W 54.8' W/HCS 10' UP
- SOUTH 9.0'

\* ADJACENT TO ADJACENT TOWN ROW TO NORTH 15.0' E of MAG # 105

SPRING DESIGN CONCRETE FOUND 20' ASPH

HARRISON

COUNTY

CORNER

21-Q  
21-Q  
21-Q

TOWNSHIP

5

RANGE

3

EAST

2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
N.E. CORNER SECTION 26	STONE	8" TREE	11.62	111-48-20			#4 Pg57	
		11" TREE	24.42	178-36-20				
		6" TREE	7.18	30-42-10				

21-Q

N.E. CORNER  
SEC 26 T.5.S

R-3-E

21Q

4N



DIETZEN NO. 3853

TREE MAPLE  
D.I.M 6"  
FROM GROUND 1' 3/2"

TREE 8"  
D.I.M  
FROM GROUND 1' 5"

30-42-10

7.18

111-48-20

11.62

178-36-20

24.42

TREE MAPLE  
D.I.M 11"  
FROM GROUND 1' 2"

HARRISON

COUNTY

RANGE 3 EAST 2 ND PRINCIPAL MERIDIAN

TOWNSHIP 5 SOUTH

CORNER 21-Y 21-Y

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
S.E. Corner Sec. 35	5" RE Bar	24" Poplar	75.34	S76-06E	3-22-83	T.B.	#2 Pg.20	Sign Placed
		15" Hack-Berry	58.3	S2-02E	3-22-83	T.B.		Sign Placed
		24" Sycamore	45.0	S73-02W	3-22-83	T.B.		Sign Placed

Stone Marked w/ Fork + Sign

NE Corners 2

T6 R3

on page with T5 R3 S35

3/15/83


I here by testify that the stone in question "being the North-east corner of section two" is at the correct location.

signed Herbert D. Duly date 3/15/83  
signed James Curtis date 3/15/83  
signed Donald C. Lipp date 3/20/83  
signed Kenneth M. Jopp date 3/20/83

witness J. M. ... date 3/15/83  
witness ~~James Curtis~~ date

witness Everett J. Imberlake date 3-15-83  
witness Cleora Imberlake date 3-20-83

21-y

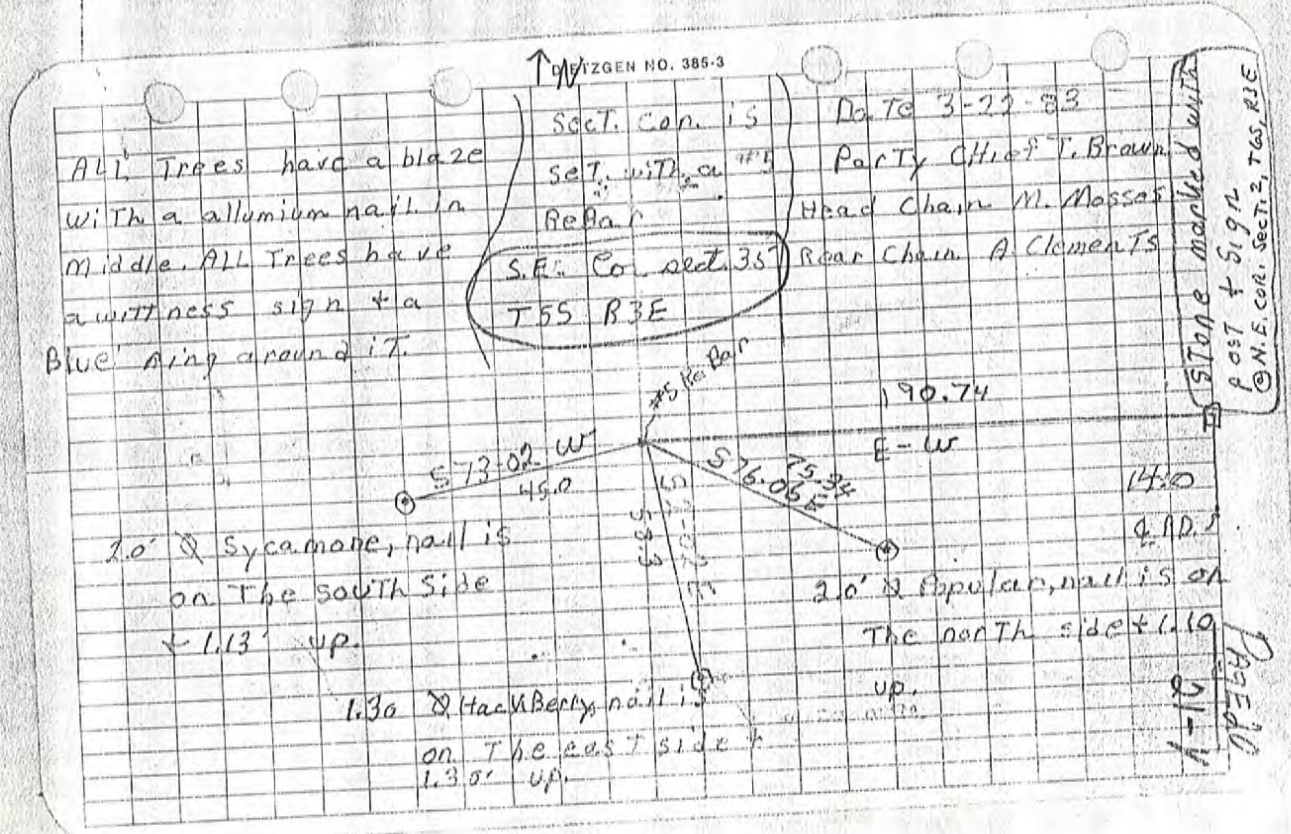

T55 ZGEN NO. 385-3

21-107

21Y


Page 20

All Trees have a blaze with a aluminum nail in middle. All trees have a witness sign + a blue ring around it.

Sect. Cor. is set. with a #5 Rebar S.E. Cor. set. 35' T55 P3E

Date 3-22-83 Party Chief T. Brown Head Chain M. Nosses Rear Chain B. Clements

Stone marked with post + sign S.W. Cor. Sect. 2, T4S, R1E

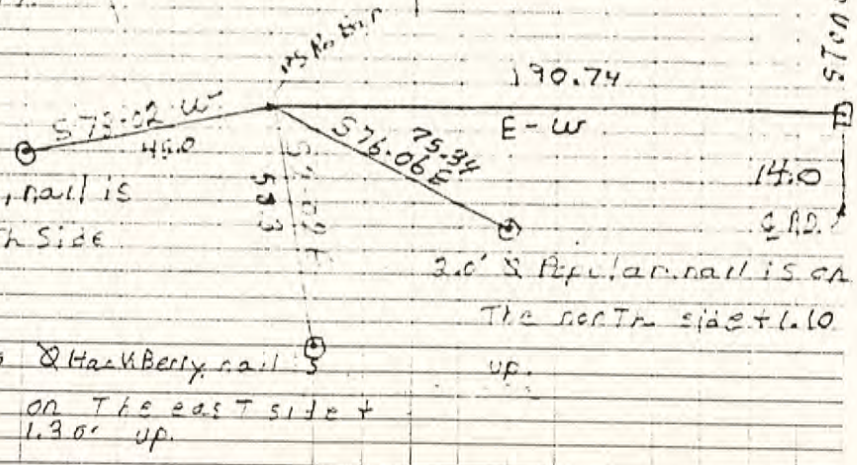

2.0' Sycamore, nail is on the south side + 1.13' up.

2.0' Poplar nail is on the north side + 1.10 up.

1.30 Hackberry nail on the east side + 1.30' up.

HARRISON

COUNTY

23-M

CORNER 23-M

TOWNSHIP 5

RANGE 3

EAST 2ND

PRINCIPAL MERIDIAN

LOCATION	DESCRIPTION OF		DISTANCE FROM CORNER	BEARING FROM CORNER	DATE CHECKED	CHECKED BY	FIELD BOOK	REMARKS
	MONUMENT	REFERENCE						
N.E. CORNER N.W. 1/4 SECTION 24	STONE IS IN POOR SHAPE				IS MARKED WITH A METAL POST & SIGN			
	2.0' OAK		11.7'	N30°-08'-E	2-28-95	T.B.	#4 Pg65	SIGN PLACED
	0.90 MAPLE		9.0'	S87°-29'-E				SIGN PLACED
	0.60' OAK		18.0'	N52°-41'-W				SIGN PLACED



23-M

TW

23M

DATE 2-28-95

0.60' Ø Oak, nail on east side + 0.70 up.

N52°41'W 18.0'

STONE is in poor shape. Broken apart.

STONE is marked with a metal post + sign

ALL TREES have a blaze with a aluminum nail in middle. ALL TREES have a witness sign.

2.0' Ø Oak, nail on east side + 1.30' up.

N30°-08'E 11.7'

0.90' Ø maple nail on north side + 1.0' up.

S87°-29'E 9.0'

#3 bar

23-17

Page 65

Party Chief T. Brown  
Head Chain M. Woodward

NE, COR. NW 1/4  
SECT 24 T5S R3E


25-A

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: A-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Northeast Corner (Township Corner) to Section 1

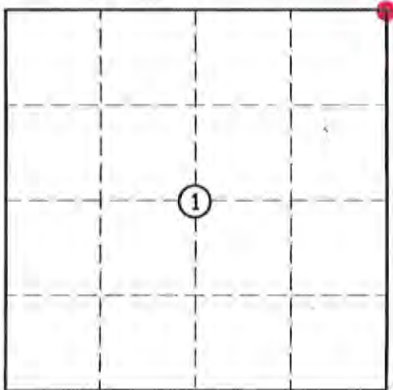EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
See surveys recorded in Survey Book 4, Pages 201, 489 and 760, Survey Book 5, Page 163 and Survey Book 6, Page 222 and 361. See 1999 Perpetuation Project.	No Photo Available.
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small>	Year of search <u>2015</u> By <u>VHM</u> <u>Recovered steel pin with cap, Primavera LS #131, 0.6' deep in Harrison-Heth Road at East side of crushed stone drive to North.</u>
Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	
	<p>Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Set mag hub in concrete plug over monument. Corner accessories established:</u>  <u>Steel pin w/cap, #4 (L.S. 131), N 2° E, 15.92', projecting 0.9'.</u>  <u>East end of 12" CMP, N 12° E, 10.91', 45 cal. drill hole.</u>  <u>West end of CMP, N 71° W, 44.02', 45 cal. drill hole.</u>  <u>Harrison County Surveyor's sign on fence post, projecting 0.6', S 1° W, 13.86', bottom nail.</u></p> <p>N: 1043921.9 E: 194744.5</p>
Signature <u>Vincent H. M.</u> Date: <u>11/02/15</u>	


25-A

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: A-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Northeast Corner (Township Corner) to Section 1

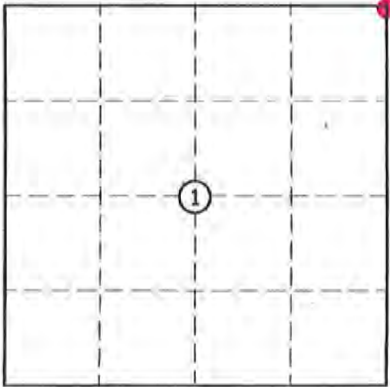EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
See surveys recorded in Survey Book 4, Pages 201, 489 and 760, Survey Book 5, Page 163 and Survey Book 6, Page 222 and 361. See 1999 Perpetuation Project.	No Photo Available.
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small>	Year of search <u>2015</u> By <u>VHM</u> <u>Recovered steel pin with cap, Primavera LS #131, 0.6' deep in Harrison-Heth Road at East side of crushed stone drive to North.</u>
Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	
	<p>Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Set mag hub in concrete plug over monument. Corner accessories established:</u></p> <p><u>Steel pin w/cap, #4 (L.S. 131), N 2° E, 15.92', projecting 0.9'.</u></p> <p><u>East end of 12" CMP, N 12° E, 10.91', 45 cal. drill hole.</u></p> <p><u>West end of CMP, N 71° W, 44.02', 45 cal. drill hole.</u></p> <p><u>Harrison County Surveyor's sign on fence post, projecting 0.6', S 1° W, 13.86', bottom nail.</u></p> <p>N: 1043921.9 E: 194744.5</p>
Signature <u>V.H.M.</u>	
Date: <u>11/02/15</u>	


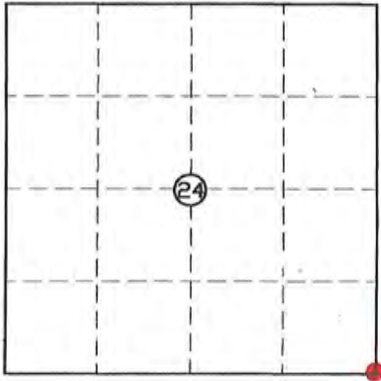
25-Q

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: Q-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Southeast Section Corner to Section 24

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
See survey recorded as Instrument Number 200700664.	
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small>	Year of search <u>2015</u> By <u>VHM</u> Recovered sandstone, 0.4' x 0.7', solid in ground, projecting 0.5', with "6" on South face, Stone was leaning slightly Northwest at the South face of a 9" white walnut. Existing cairn of rocks.
Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	
	Perpetuation Record Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Fortified existing cairn of rocks.</u> Corner accessories established: <u>Beech 9", S 5° E, 3.5' with Harrison County Surveyor's sign.</u> <u>Rectangular Harrison County Surveyor's sign on steel post, S 63° E, 2.0'</u> <u>Ash 40" (dead) snag w/wire, N 13° E, 70'±</u> <u>W. Oak 14" S 56° E, 12.0'</u> <u>Fence, West, 80'±</u>  N: 1022694.5 E: 194068.3
Signature <u>Vicki H. M.</u> Date: <u>Nov. 27, 2015</u>	<u>Nov. 30 2015 Harold G. Rintner</u>


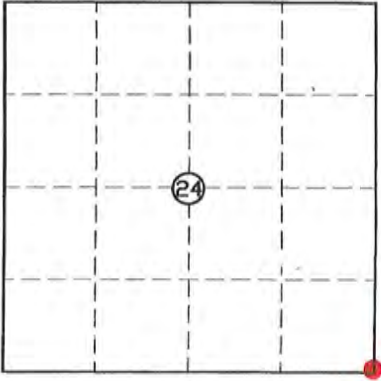
25-Q

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: Q-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

Southeast Section Corner to Section 24

EXISTING SURVEYS	
No Original Government Survey Evidence Recovered	Picture/Sketch
See survey recorded as Instrument Number 200700664.	
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small>	Year of search <u>2015</u> By <u>VHM</u> Recovered sandstone, 0.4' x 0.7', solid in ground, projecting 0.5', with "25" on South face. Stone was leaning slightly Northwest at the South face of a 9" white walnut. Existing cairn of rocks.
Bearing Trees, Reference Objects Species _____ Diameter _____ Bearing _____ Distance _____	
	Perpetuation Record Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Fortified existing cairn of rocks.</u> Corner accessories established: <u>Beech 9", S 5° E, 3.5' with Harrison County Surveyor's sign.</u> <u>Rectangular Harrison County Surveyor's sign on steel post, S 63° E, 2.0'</u> <u>Ash 40" (dead) snag w/wire, N 13° E, 70'±</u> <u>W. Oak 14" S 56° E, 12.0'</u> <u>Fence, West, 80'±</u>
Signature <u>Vint H. M</u> Date: <u>Nov. 27, 2015</u>	N: 1022694.5 E: 194068.3  <u>Nov. 30 2015 Harold G. K...</u>

25-U

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: U-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

East Section Corner common to Sections 25 and 36

EXISTING SURVEYS

No Original Government Survey Evidence Recovered

Picture/Sketch

See surveys recorded in Survey Book 4, Page 495 and Instrument Number 200700664.



Subsequent Corner Restoration

Evidence of Subsequent Corner Restoration Found

Year surveyed \_\_\_\_\_ By \_\_\_\_\_  
Where filed or recorded \_\_\_\_\_  
Monument \_\_\_\_\_  
(Original, concrete post, iron rod, etc...)

Year of search 2015 By VHM  
Recovered limestone, flush with ground, with mag hub 0.5' North. Stone is 7' South of South edge of pavement of Otterbein Road.

Bearing Trees, Reference Objects


Species \_\_\_\_\_  
Diameter \_\_\_\_\_  
Bearing \_\_\_\_\_  
Distance \_\_\_\_\_

Perpetuation Record

Monument and accessories established. Include brief description of area. Monument left as recovered. Set rectangular Harrison County Surveyor's sign South 3' and placed a cairn of rocks around the monument. Corner accessories established:

Cedar 8", S 18° E, 7.2', MN +1.0' on NE side.  
Beech 29", S 27° E, 16.2', MN + 0.6' on NE side.  
Poplar (Twin) 16", N 5° E, 35.1' MN + 1.0' on W side.  
Water meter, N 19° W, 48.2'.

N: 1017384.1  
E: 193896.2

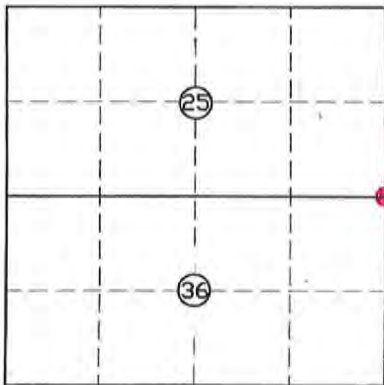

Signature Vick H.M.

Date: 11/02/15


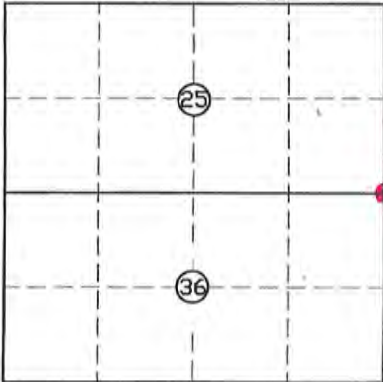
25-U

LAND CORNER RECORD  
(RECTANGULAR SURVEYS)

Harrison County Surveyor's Reference Index Number: U-25

T 5 S R 3 E 2nd Mer., County Harrison State Indiana

East Section Corner common to Sections 25 and 36

EXISTING SURVEYS	
<p>No Original Government Survey Evidence Recovered</p>	<p>Picture/Sketch</p>
<p>See surveys recorded in Survey Book 4, Page 495 and Instrument Number 200700664.</p>	
<p>Subsequent Corner Restoration</p>	<p>Evidence of Subsequent Corner Restoration Found</p>
<p>Year surveyed _____ By _____ Where filed or recorded _____ Monument _____ <small>(Original, concrete post, iron rod, etc...)</small></p>	<p>Year of search <u>2015</u> By <u>VHM</u> <u>Recovered limestone, flush with ground, with mag hub 0.5' North. Stone is 7' South of South edge of pavement of Otterbein Road.</u></p>
<p>Bearing Trees, Reference Objects</p> <p>Species _____ Diameter _____ Bearing _____ Distance _____</p>	<p>Perpetuation Record</p> <p>Monument and accessories established. Include brief description of area. <u>Monument left as recovered. Set rectangular Harrison County Surveyor's sign South 3' and placed a cairn of rocks around the monument. Corner accessories established:</u>  <u>Cedar 8", S 18° E, 7.2', MN +1.0' on NE side.</u>  <u>Beech 29", S 27° E, 16.2', MN + 0.6' on NE side.</u>  <u>Poplar (Twin) 16", N 5° E, 35.1' MN + 1.0' on W side.</u>  <u>Water meter, N 19° W, 48.2'.</u></p> <p>N: 1017384.1 E: 193896.2</p>
	<p>Signature <u>Vik H.M.</u> Date: <u>11/02/15</u></p>