


Thin Client Connection Illustration

If the keyboard is USB and not PS/2 (round), insert the keyboard connection into the USB port

Plug the network cable into the Ethernet port

Connect the monitor to the blue VGA connector

Connect the power supply to the round power slot

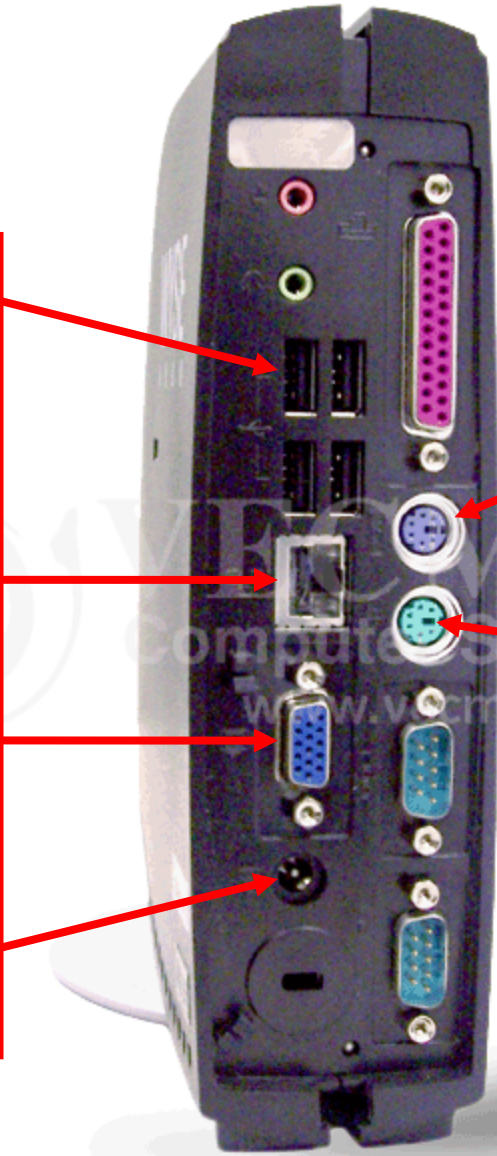

If the keyboard connection is round & purple, connect to the PS/2 port

Connect the mouse to the green PS/2 mouse port